

A

B

C

D

E

F

A

B








C

D

E

F

A-A

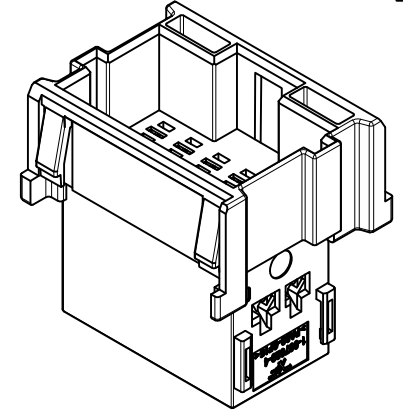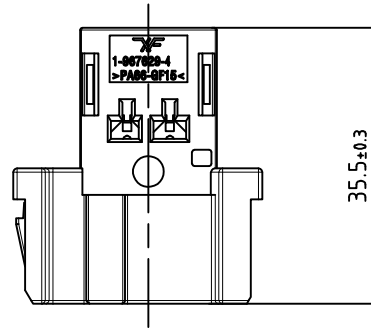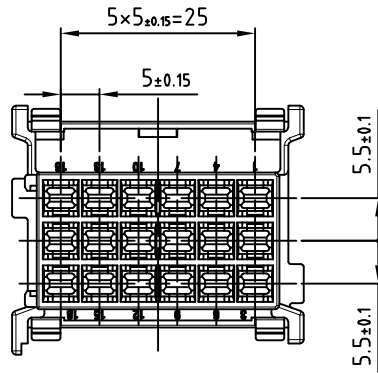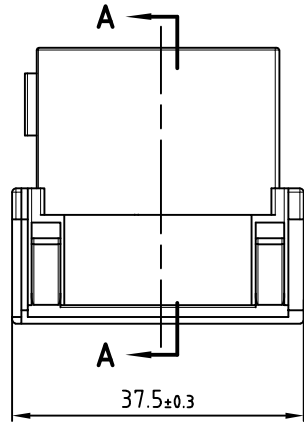

注:

- 1、工作温度:-40℃~125℃
- 2、UL阻燃性等级:UL-94 HB
- 3、电气特征:工作电压(VDC):28

标称电压架构(V):12|24

- 4、OEM:1-967629-4

宁波翔洋电气有限公司

NINGBO XF ELECTRONIC CO., LTD

设计	Lai	2025.11	标准化		名称	连接件		
校对	Yang	2025.11			型号	XF7181-2.8-11Ye		
审核	Zhang	2025.11	比例	1.5:1	材料	PA66+GF13		
未注公差: XX.X ±0.2;					颜色	黄色		
					重量			
					阶段标记	版次	01	
					A	页数		