

A

B

C

D

E

F

A







B

C

D

E

F

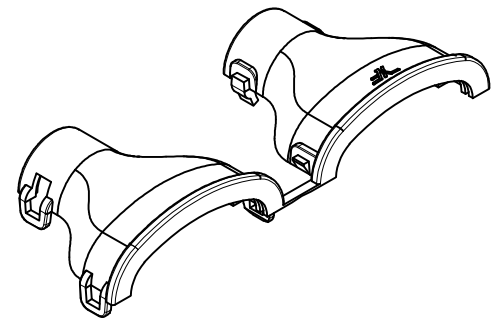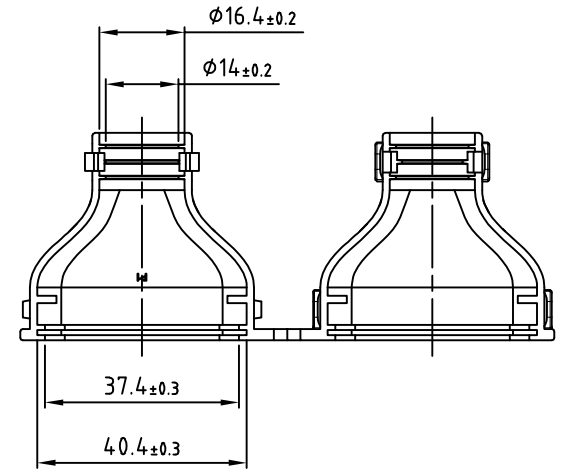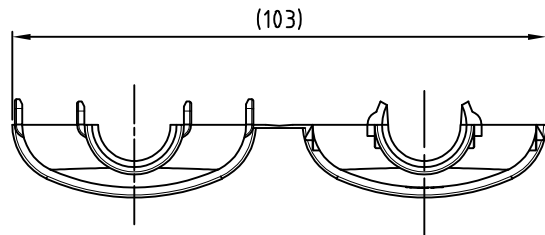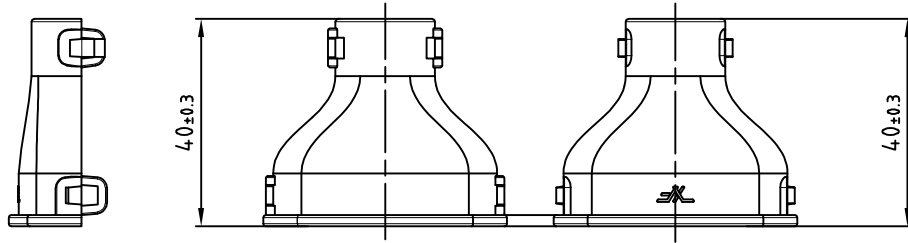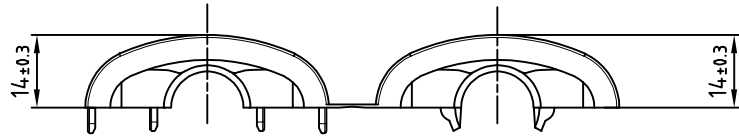

NOTES:

- 1.Working temperature range: -40℃ TO +125℃.
- 2.UL Flame resistance rating:UL-94 HB
- 3.Compatible corrugated tube: NW13

 宁波翔沣电气有限公司

NINGBO XF ELECTRONIC CO.,LTD

Design	Lai	2025. 11	Revision	01	Name		Backshell	
					DrawingNo		1J0973735C	
					Material		PA66	
Proofread	Yang	2025. 11			Color		Black	
					Weight Kg			
Approval	Zhang	2025. 11	Scale	1:1		Pages		