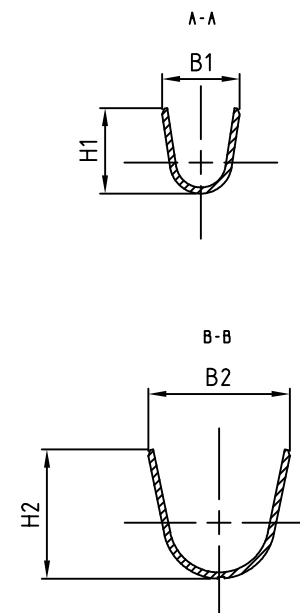
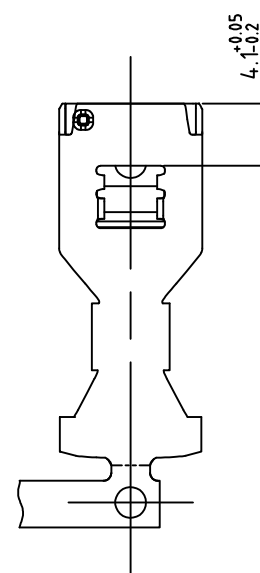
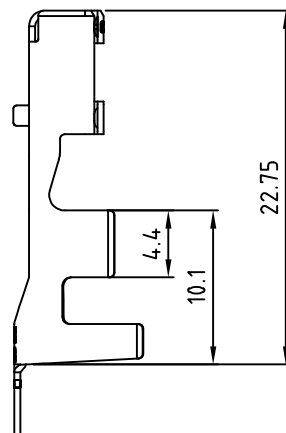
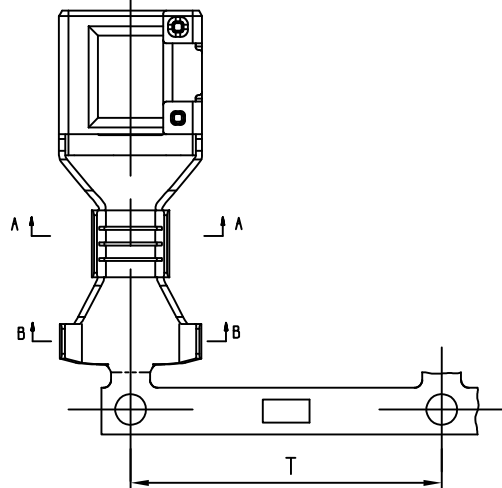
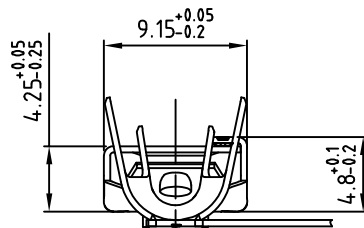


2:1

技术要求:

- 1、表面无毛刺, 未注圆角R0.2,无压伤,变形, 毛边最大不得超过0.05mm.
- 2、技术标准: QC/T 417

角 度 ANGULAR	± 3°
18	± 0.3
6	± 0.25
0	± 0.2
>	<
未 注 公 差 TOLERANCE UNLESS OTHERWISE SPECIFIED	

零件号 PART ID.	材料名称 MAT'L NAME	重量 WEI.	表面处理 SURFACE CLASS	端子结构 TERMINAL CLASS	H ₁	B ₁	H ₂	B ₂	T	端子尺寸 SIZE	适用导线截面积 WIRE mm ²
0141602	H65Y δ=0.4	1.3g	镀锡亮锡	键槽	4.5±0.29	5±0.29	7.3±0.29	8±0.29	29.2	C	2.5-4.0
0141601	H65Y δ=0.4	1.3g	镀锡亮锡	键槽	5.5±0.29	5±0.29	8.3±0.29	9.1±0.29	29.2	D	4.0-6.0

 宁波翔洋电气有限公司 NINGBO XF ELECTRONIC CO., LTD				名 称	端子			
				型 号	XF01416			
设 计	Lai	2025. 11	标准化	材 料	H65Y			
				颜 色				
校 对	Yang	2025. 11		重 量				
审 核	Zhang	2025. 11	比 例	3:1	阶段标记	版 次	01	
未注公差: XX.X ±0.2;					A	页 数		