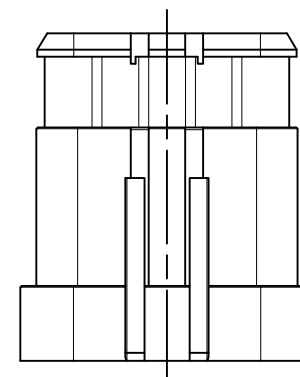
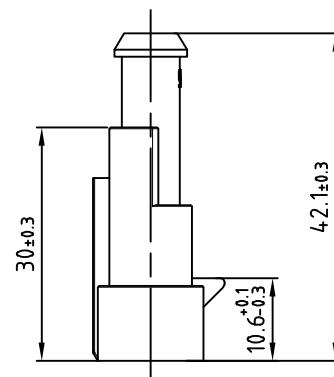
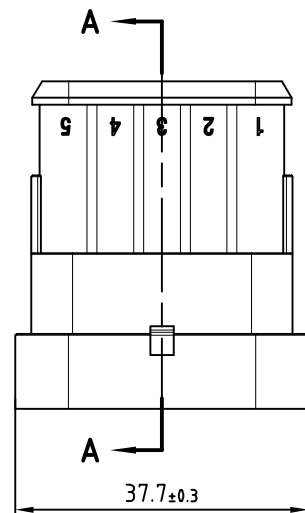
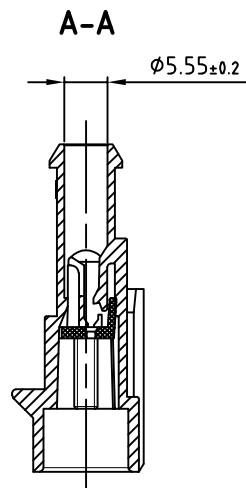
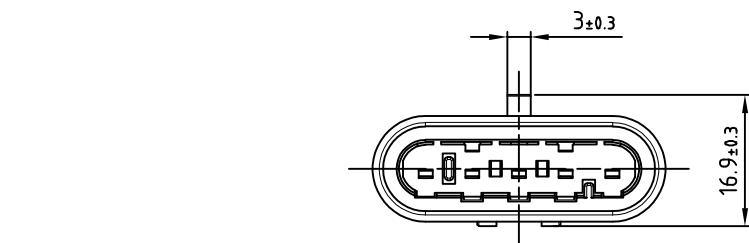


NOTES:

- 1.Rated current (maximum): 14A.
- 2.Working temperature range: -40℃ TO +125℃.
- 3.UL Flame resistance rating:UL-94 HB
- 4.Electrical characteristics:
Working voltage (VDC):24
Rated voltage configuration (V):12 | 24 | 48

 宁波翔沣电气有限公司 NINGBO XF ELECTRONIC CO.,LTD					Name	Connector		
					DrawingNo	XF7051-1.5-11Bk		
					Material	PA66+GF13		
Design	Lai	2025.11	Revision	01	Color	Black		
Proofread	Yang	2025.11			Weight Kg			
Approval	Zhang	2025.11	Scale	1.5:1		Pages		