
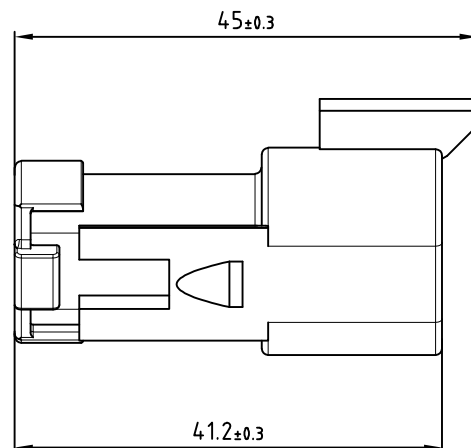
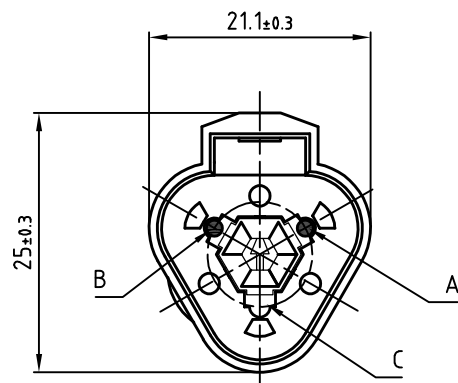
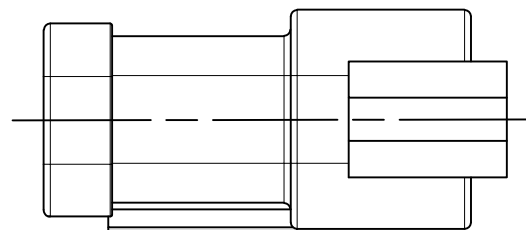


WIRING DIAGRAM

120 OHMS
1/8 WATT
5%



NOTES:

- 1.Rated current (maximum): 13A.
 - 2.Working temperature range: -40℃ TO +125℃.
 - 3.Moisture resistance:IP68,IP6K9K.
 - 4.UL Flame resistance rating:UL-94 V0
 - 5.120Ω RESISTOR IS INSERTED INTO CAVITIES A AND B RESISTOR
- CHARACTERISTICS:120Ω±5%.

 宁波翔沣电气有限公司
NINGBO XF ELECTRONIC CO.,LTD

 宁波翔沣电气有限公司 NINGBO XF ELECTRONIC CO.,LTD					Name		Connector	
					DrawingNo		XT04-3P-P006(B)	
					Material		PA66	
Design	Yang	2025.6	Revision	01	Color		Gray	
Proofread	Yang	2025.6			Weight Kg			
Approval	Zhang	2025.6	Scale	2:1			Pages	