



1 | 2 | 3 | 4 | 5 | 6 | 7 | 8


A

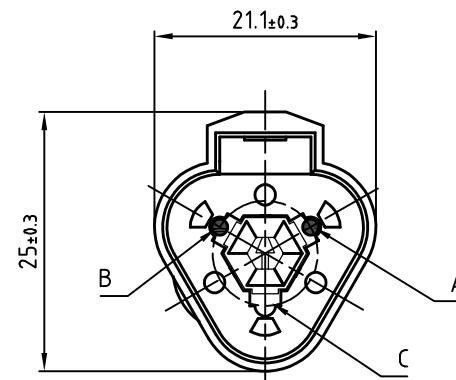


B

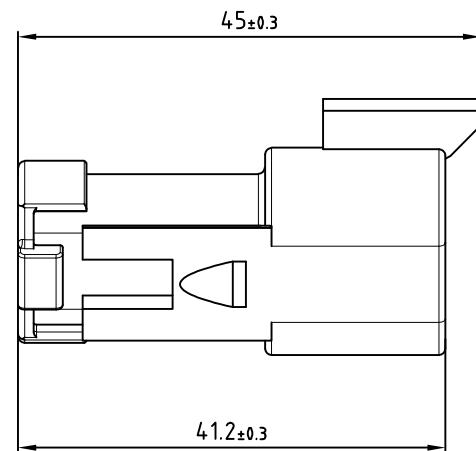

C



WIRING DIAGRAM

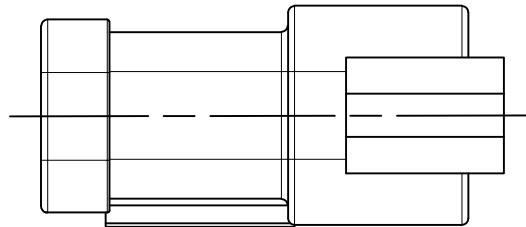

注:

- 1、端子额定电流(最大值) (A):13A
- 2、工作温度:-40℃~125℃
- 3、防水:IP68、IP6K9K
- 4、UL阻燃性等级:UL-94 V0
- 5、电阻120Ω 1/8W 5%

 宁波翔沣电气有限公司
NINGBO XF ELECTRONIC CO., LTD

名称	连接件		
型号	XT04-3P-P006(B)		
材料	PA66		
颜色	灰色		
重量			
设计	Yang	2025.6	标准化
校对	Yang	2025.6	
审核	Zhang	2025.6	比例 2:1
未注公差: XX.X ±0.2;			阶段标记 版次 01
A			页数

1 | 2 | 3 | 4 | 5 | 6 | 7 | 8