


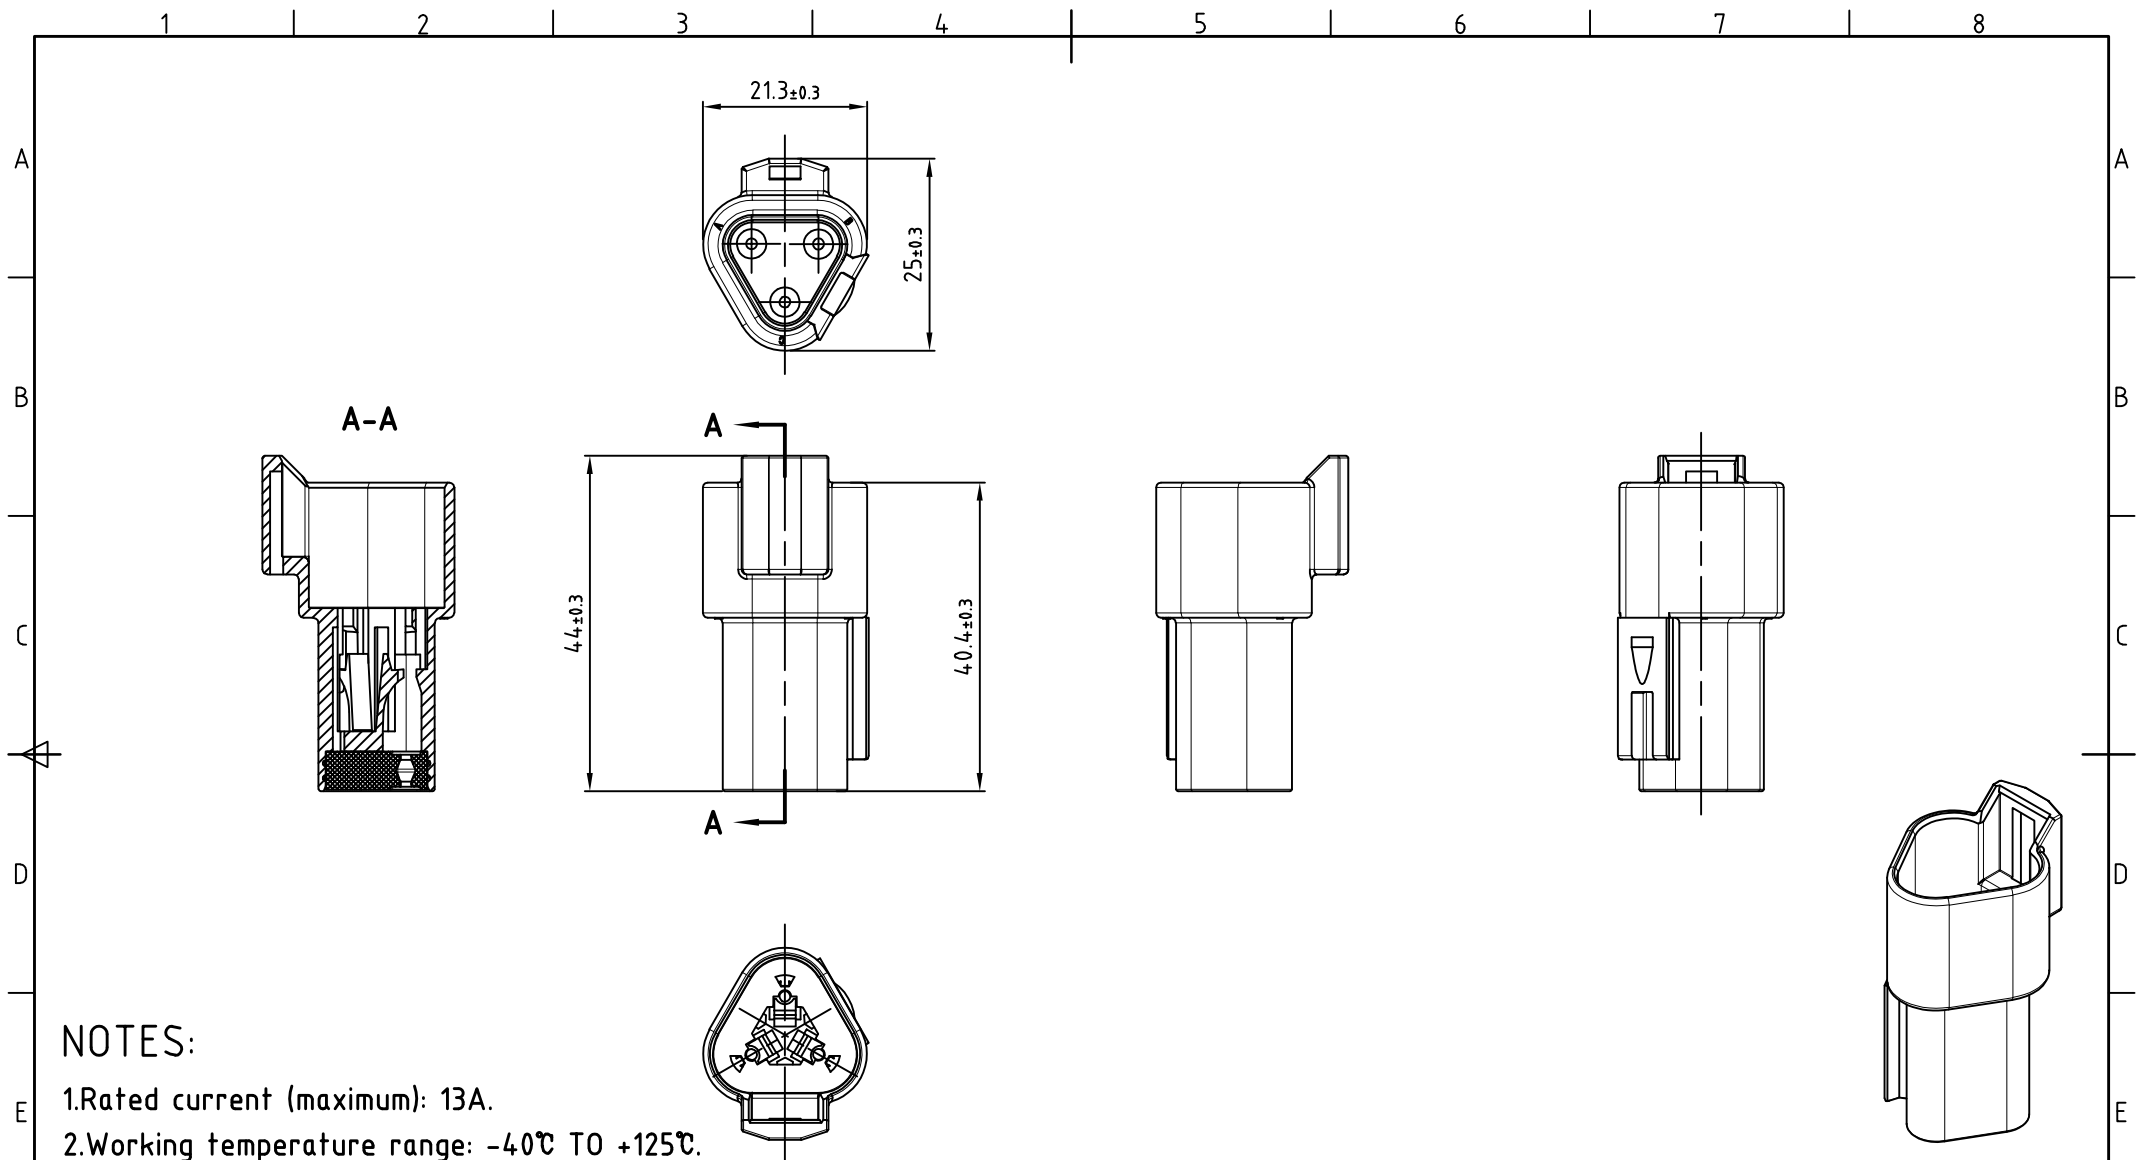

NOTES:

1. Rated current (maximum): 13A.
2. Working temperature range: -40℃ TO +125℃.
3. Moisture resistance: IP68, IP6K9K.
4. UL Flame resistance rating: UL-94 V0
5. Electrical characteristics:
 - Working voltage (VDC): 250
 - Working voltage (VAC): 250
 - Rated voltage configuration (V): 12 | 24 | 48

 宁波翔沅电气有限公司 NINGBO XF ELECTRONIC CO.,LTD					Name	Connector	
					DrawingNo	XT04-3P-CE02	
					Material	PA66+GF15	
Design	Lai	2025.11	Revision	01	Color	Black	
Proofread	Yang	2025.11			Weight Kg		
Approval	Zhang	2025.11	Scale	1.5:1		Pages	