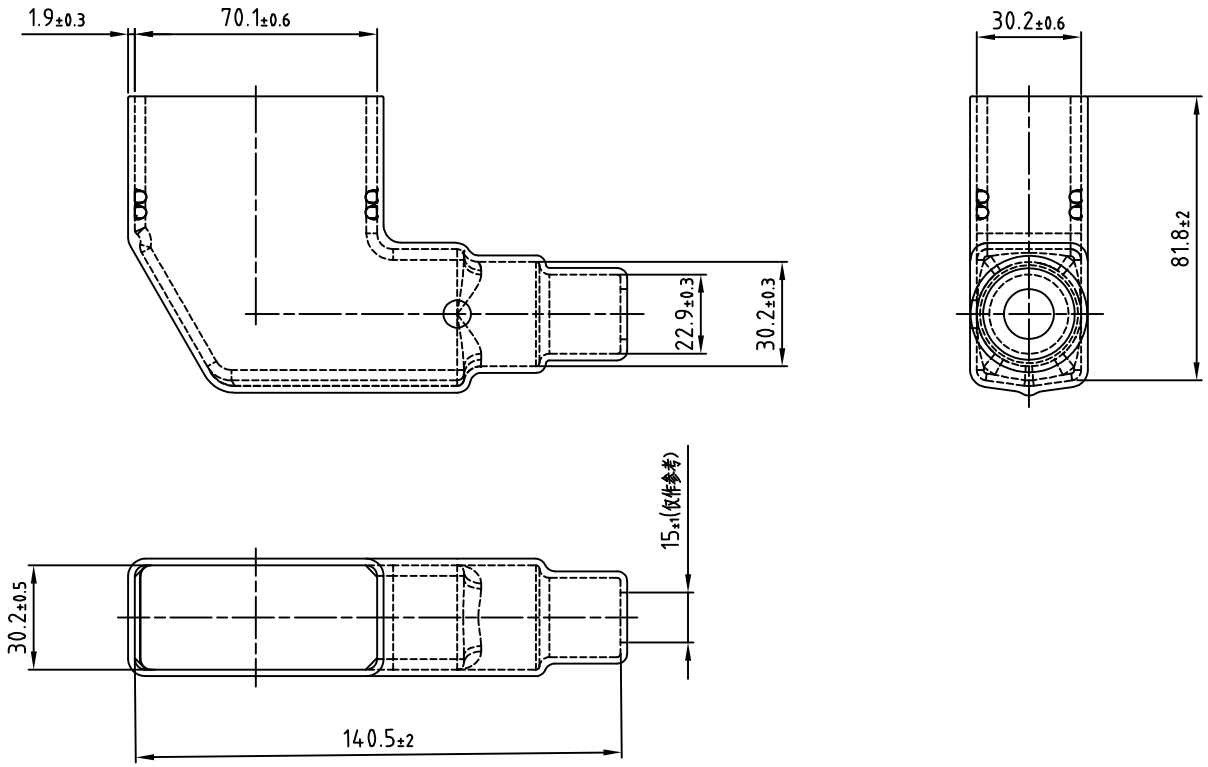

NOTES:

1. Products comply with RoHS directive and REACH regulations
2.Allow for material drops, no holes allowed
3.Fully plasticized, cannot be by hand, no damage to the surface, no burning, no impurities
4.Tensile strength ≥ 2.5 MPa, elongation at break ≥120%, hardness Shore 65 ± 5HA

宁波翔沣电气有限公司 NINGBO XF ELECTRONIC CO.,LTD					Name	Protective sheath
					DrawingNo	XFYT70-22.9-83.8(1.9)C
					Material	PVC
Design	Lai	2025.12	Revision	01	Color	Black
Proofread	Yang	2025.12			Weight Kg	
Approval	Zhang	2025.12	Scale	1:1		Pages