

1 2 3 4 5 6 7 8

A

B

C

D

NOTES:

1.Rated current (maximum): 13A.

2.Working temperature range: -40°C TO +125°C.

3.Moisture resistance:IP68,IP6K9K.

4.UL Flame resistance rating:UL-94 V0

5.Electrical characteristics:








Working voltage (VDC):250

Working voltage (VAC):250

Rated voltage configuration (V):12 | 24 | 48

6.Resistor inserted into cavities 'A' and 'B'

7.Resistor characteristics:120Ω±10%,0.4W MIN

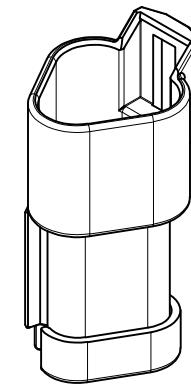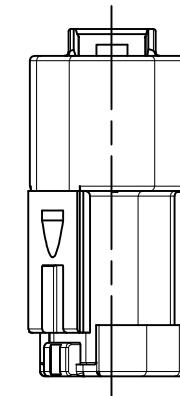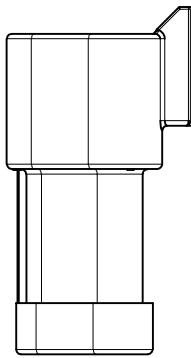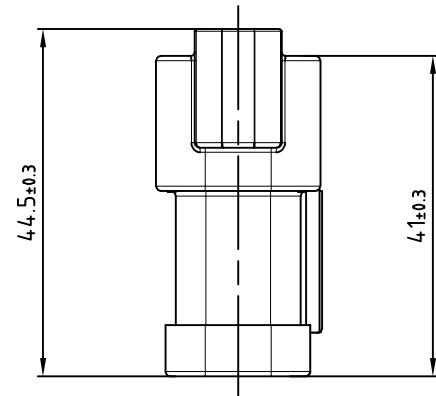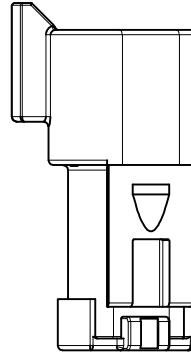

 宁波翔沣电气有限公司
NINGBO XF ELECTRONIC CO., LTD

Name	Connector			
DrawingNo	XT04-3P-EP10			
Material	PA66+GF			
Design	Lai	2025.4	Revision	01
Proofread	Yang	2025.4		
Approval	Zhang	2025.4	Scale	1.5:1
Color	Black			
Weight Kg				
Pages				

1 2 3 4 5 6 7 8