

A

B

C

D

E

F

A








B

C

D

E

F

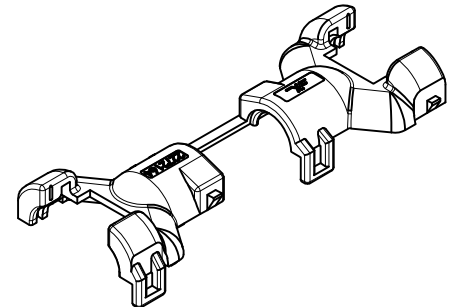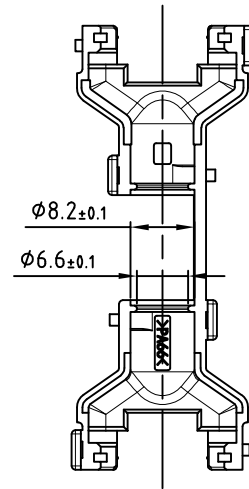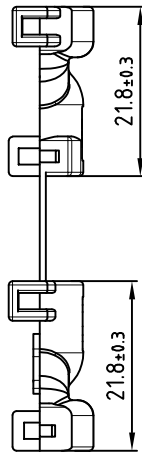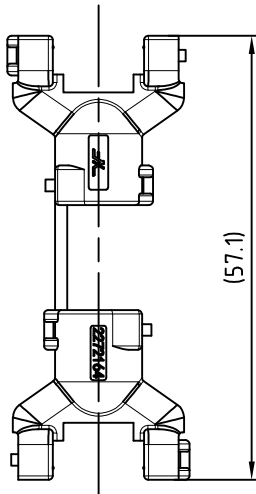

注:

- 1、工作温度: $-40^{\circ}\text{C} \sim 125^{\circ}\text{C}$
- 2、UL阻燃性等级: UL-94 V2
- 3、适配波纹管NW4.5mm

宁波翔洋电气有限公司
NINGBO XF ELECTRONIC CO., LTD

设 计	Lai	2025.12	标准化		颜 色		黑色	
校 对	Yang	2025.12			重 量			
审 核	Zhang	2025.12	比 例	1.5:1	阶段标记		版 次	01
未注公差: XX.X ±0.2;					A			页 数