
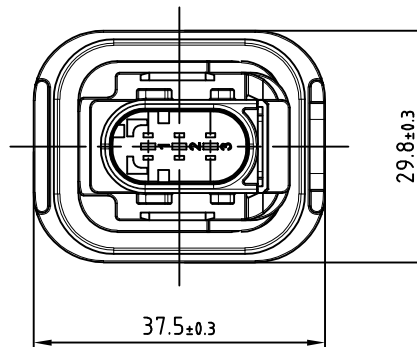
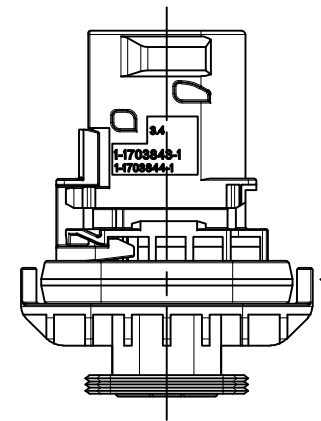
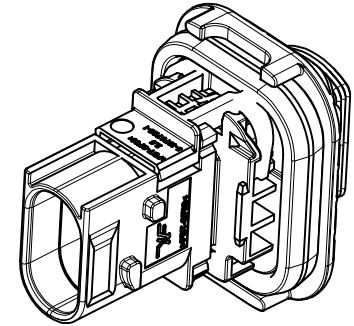
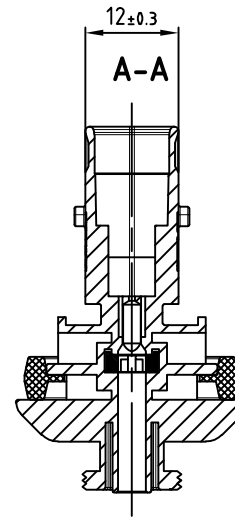
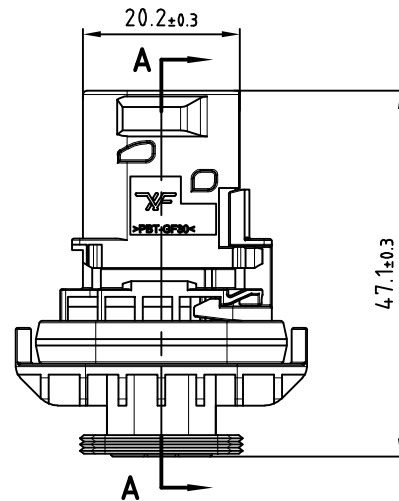



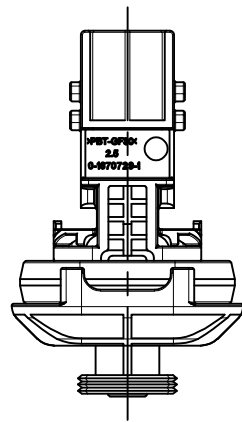

NOTES:

- 1.Rated current (maximum): 20A.
- 2.Working temperature range: -40℃ TO +120℃.
- 3.Moisture resistance:IP67.
- 4.UL Flame resistance rating:UL-94 V0
- 5.Electrical characteristics:
Working voltage (VDC):60
Rated voltage configuration (V):12 | 24 | 48

宁波翔沣电气有限公司
NINGBO XF ELECTRONIC CO.,LTD

Design	Lai	2025. 12	Revision	01
Proofread	Yang	2025. 12		
Approval	Zhang	2025. 12	Scale	1.5:1

Name	Connector
DrawingNo	XF7036-1.5-11GrS
Material	PBT+GF
Color	Gray
Weight Kg	
Pages	