



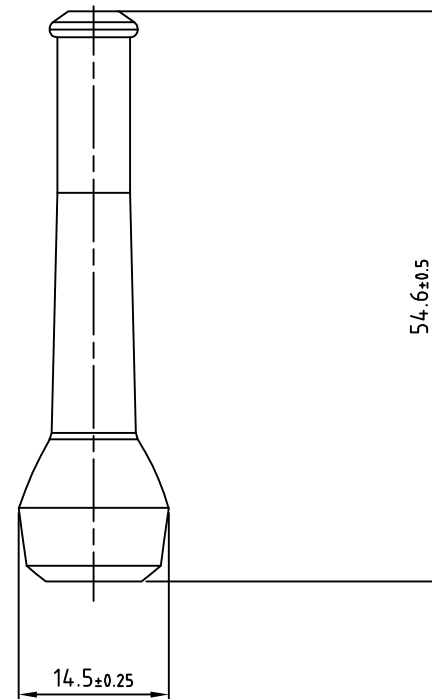

NOTES:

1. Working temperature range: -40°C TO $+125^{\circ}\text{C}$.
2. UL Flame resistance rating: UL-94 V0
3. Good high and low temperature resistance, environmental hazardous substances meet ROHS requirements.

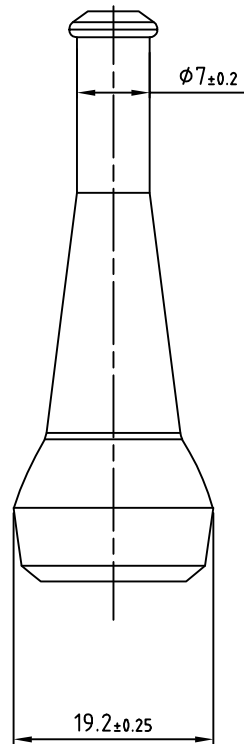

宁波翔沣电气有限公司

NINGBO XF ELECTRONIC CO., LTD

Design	Lai	2025. 12	Revision	01	Name		Rubber Parts	
					DrawingNo		XQ-209	
					Material		EPDM	
Proofread	Yang	2025. 12			Color		Black	
Approval	Zhang	2025. 12	Scale	2:1	Weight Kg			
							Pages	