

A

B

C

D

E

F

A








B

C

D

E

F

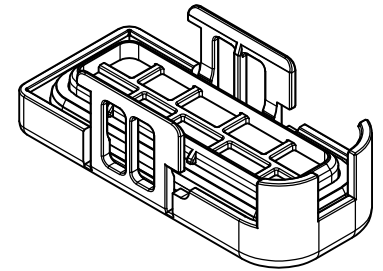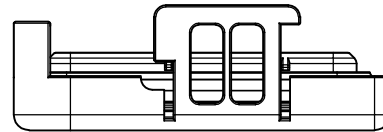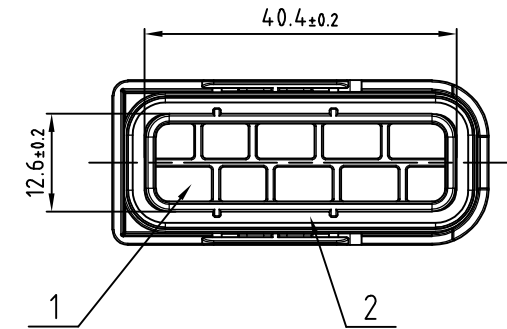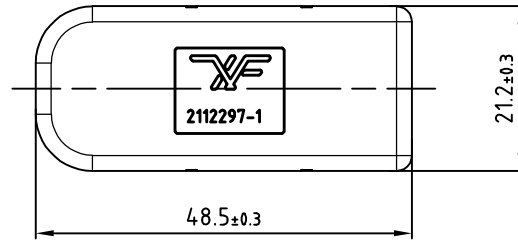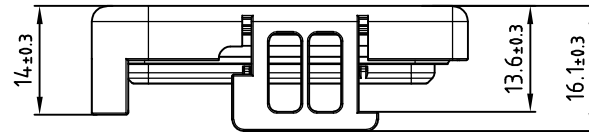

NOTES:

1. Working temperature range: -40℃ TO +150℃.
2. UL Flame resistance rating: UL-94 HB

 宁波翔沣电气有限公司
NINGBO XF ELECTRONIC CO., LTD

Design	Lai	2025. 12	Revision	01
Proofread	Yang	2025. 12		
Approval	Zhang	2025. 12	Scale	1. 5:1

Name	Connector	
DrawingNo	XF2112297-1	
Material	PA66+GF10	
Color	Black	
Weight	6. 2g	
Pages		

