
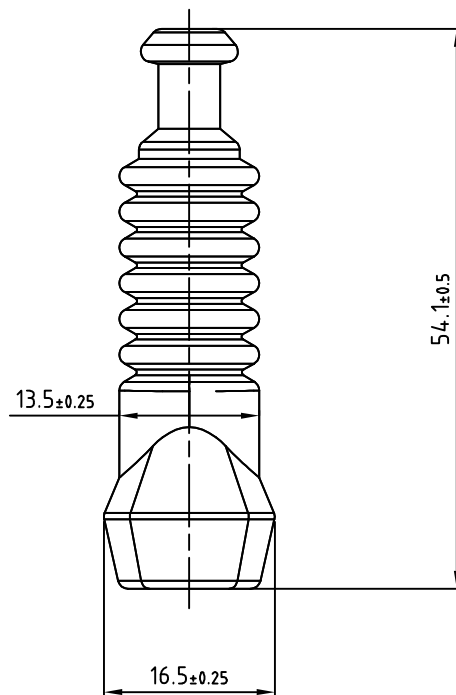


NOTES:

- 1.Working temperature range: -40℃ TO +125℃.
- 2.UL Flame resistance rating:UL-94 V0
- 3.Good high and low temperature resistance, environmental hazardous substances meet ROHS requirements.

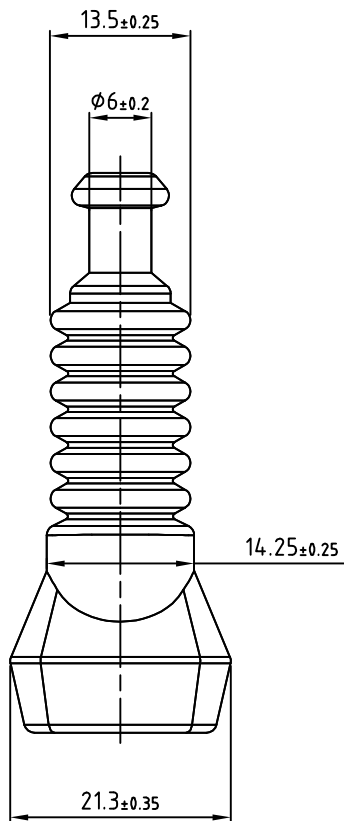

宁波翔沣电气有限公司

NINGBO XF ELECTRONIC CO.,LTD

Design	Lai	2025. 12	Revision	01	Name		Rubber Parts	
					DrawingNo		XQ-310	
					Material		EPDM	
Proofread	Yang	2025. 12			Color		Black	
Approval	Zhang	2025. 12	Scale	2:1	Weight Kg			
							Pages	