


NOTES:

- Working temperature range: -40°C TO $+125^{\circ}\text{C}$.
- UL Flame resistance rating:UL-94 V0
- Good high and low temperature resistance, environmental hazardous substances meet ROHS requirements.

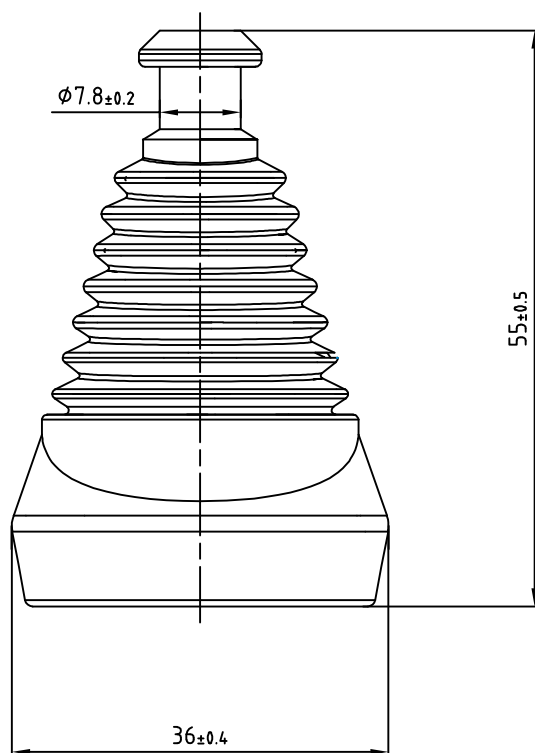

宁波翔沣电气有限公司

NINGBO XF ELECTRONIC CO.,LTD

Design	Lai	2025. 12	Revision	01	Name	Rubber Parts	
					DrawingNo	XQ-888	
					Material	EPDM	
Proofread	Yang	2025. 12			Color	Black	
Approval	Zhang	2025. 12	Scale	2:1	Weight Kg		
						Pages	