








A
B
C
D
E
F

1 2 3 4 5 6 7 8

A
B
C
D
E
F



A-A

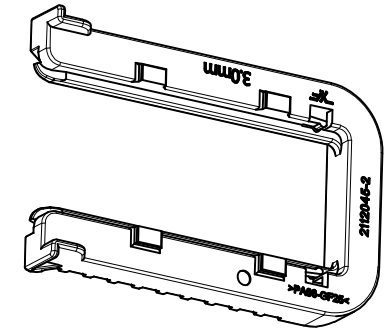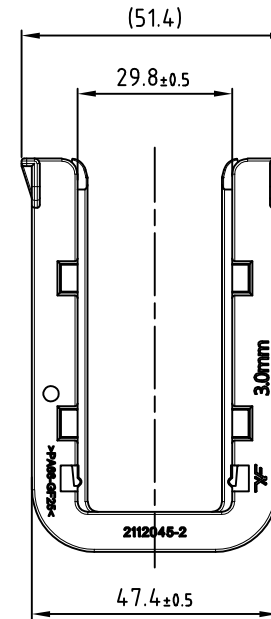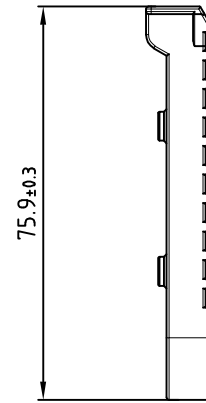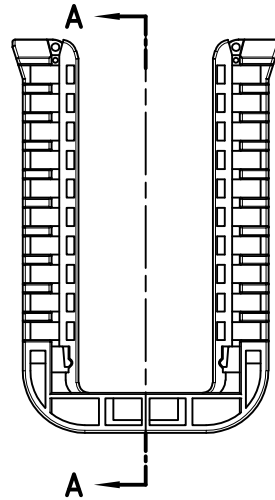

NOTES:

- 1.Working temperature range: -40℃ TO +150℃.
- 2.UL Flame resistance rating:UL-94 HB

 宁波翔沣电气有限公司

NINGBO XF ELECTRONIC CO.,LTD

Design	Lai	2025.12	Revision	01	Color	Yellow	
Proofread	Yang	2025.12			Weight Kg		
Approval	Zhang	2025.12	Scale	1:1		Pages	

1 2 3 4 5 6 7 8