

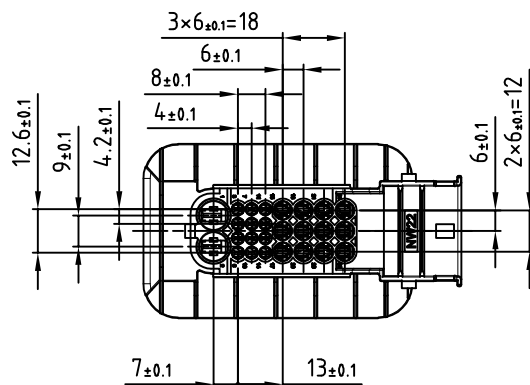






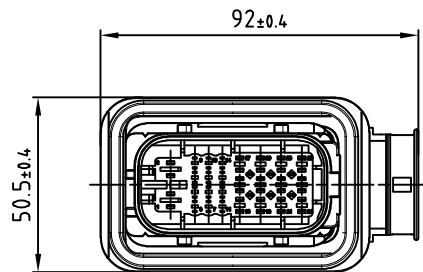

注:

- 端子额定电流 (最大值) (A):23|29|45
 - 工作温度:-40℃~120℃
 - 防水:IP67、IP69K
 - UL阻燃性等级:UL-94 HB
 - 电气特征:工作电压 (VDC):42
- 标称电压架构 (V):12|24

 宁波翔洋电气有限公司 NINGBO XF ELECTRONIC CO., LTD				名称	连接件		
				型号	XF7263-1.5&2.8&5.8-11Bk		
				材料	PBT+GF30		
设计	Lai	2025.12	标准化	颜色	黑色		
校对	Yang	2025.12		重量			
审核	Zhang	2025.12	比例	1:1.5	阶段标记	版次	01
未注公差: XX.X ±0.2;					A	页数	