

A

B

C

D

E

F

A




B

C





D

E

F

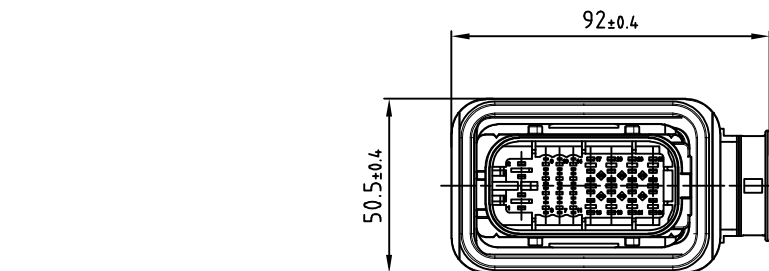

A-A

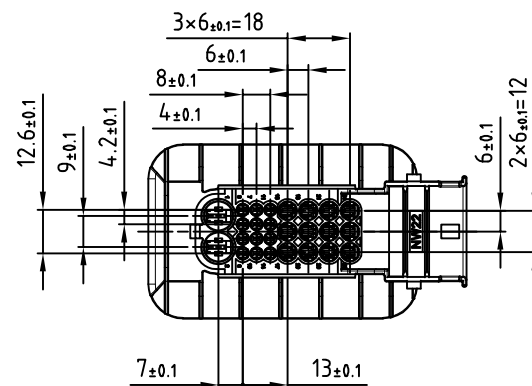

## NOTES:

- 1.Rated current (maximum): 23|29|45.
- 2.Working temperature range: -40℃ TO +120℃.
- 3.Moisture resistance:IP67,IP69K.
- 4.UL Flame resistance rating:UL-94 HB
- 5.Electrical characteristics:  
Working voltage (VDC):42  
Rated voltage configuration (V):12 | 24

宁波翔沣电气有限公司  
NINGBO XF ELECTRONIC CO.,LTD

|           |       |         |          |       |           |                         |
|-----------|-------|---------|----------|-------|-----------|-------------------------|
| Design    | Lai   | 2025.12 | Revision | 01    | Name      | Connector               |
| Proofread | Yang  | 2025.12 |          |       | DrawingNo | XF7263-1.5&2.8&5.8-11Bk |
| Approval  | Zhang | 2025.12 | Scale    | 1:1.5 | Material  | PBT+GF30                |
|           |       |         |          |       | Color     | Black                   |
|           |       |         |          |       | Weight Kg |                         |
|           |       |         |          |       | Pages     |                         |