

A

B

C

D

E

F

A








B

C

D

E

F

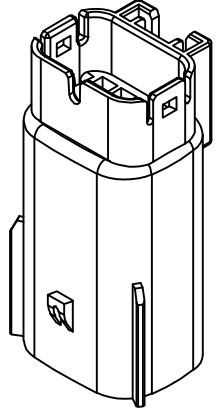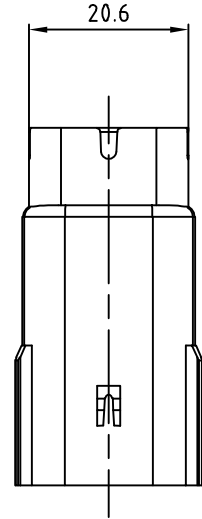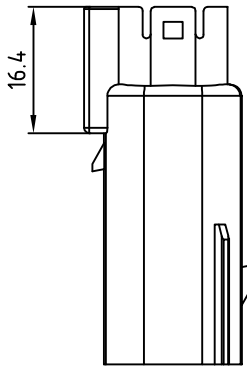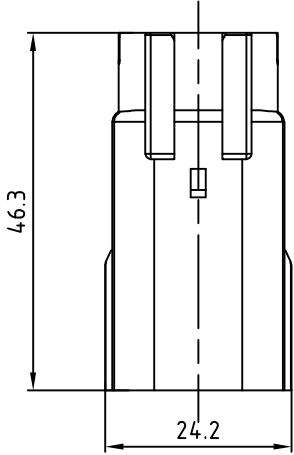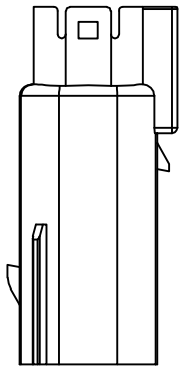

注:

- 1、工作温度:-40℃~125℃
- 2、UL阻燃性等级:UL-94 HB
- 3、未注公差MT6级

 宁波翔沣电气有限公司 NINGBO XF ELECTRONIC CO.,LTD					名称	连接件		
					型号	SY33482-0801		
					材料	PA66+GF		
设计	Lai	2025.12	标准化		颜色	黑色		
校对	Yang	2025.12			重量			
审核	Zhang	2025.12	比例	1.5:1	阶段标记	版次	01	
未注公差: XX.X ±0.2;					A	页数		