

A

B

C

D

E

F

A








B

C

D

E

F

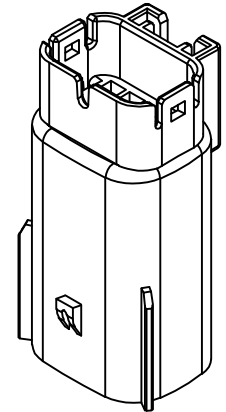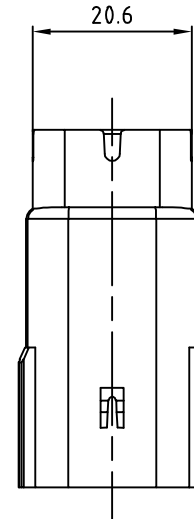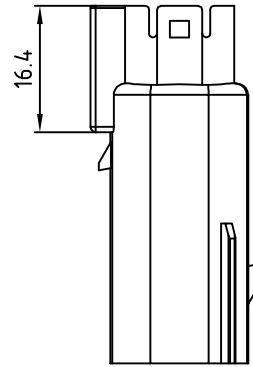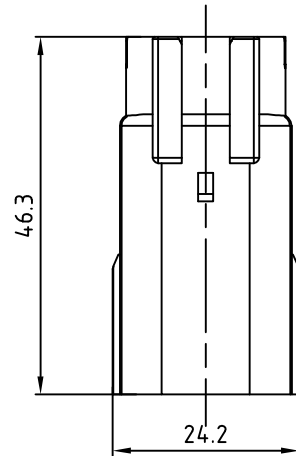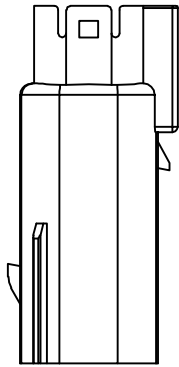

NOTES:

- 1.Working temperature range: -40°C TO $+125^{\circ}\text{C}$.
- 2.UL Flame resistance rating:UL-94 HB
- 3.Ungraded tolerance MT6 grade

 宁波翔沣电气有限公司
NINGBO XF ELECTRONIC CO.,LTD

Design	Lai	2025. 12	Revision	01	Color	Black	
Proofread	Yang	2025. 12			Weight Kg		
Approval	Zhang	2025. 12	Scale	1. 5:1		Pages	

