
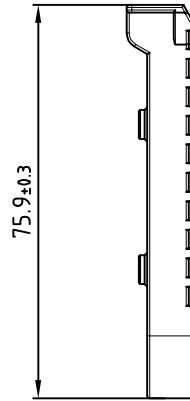
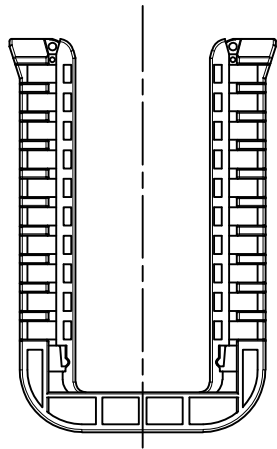





A
B
C
D
E
F

1 2 3 4 5 6 7 8


A
B
C
D
E
F



75.9±0.3

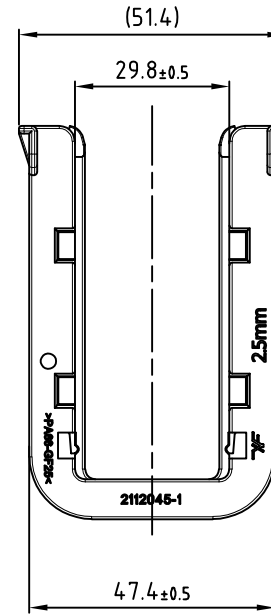

6.1±0.3

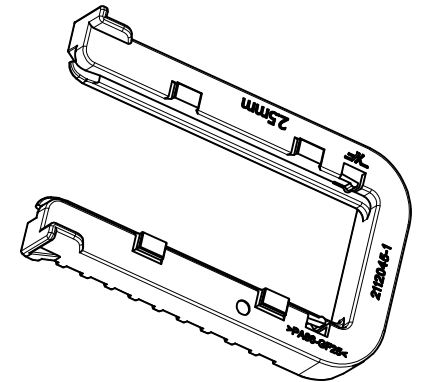

注:
1、工作温度:-40℃~150℃
2、UL阻燃性等级:UL-94 HB

 宁波翔沣电气有限公司 NINGBO XF ELECTRONIC CO.,LTD					名称	安装卡箍		
					型号	XF2112045-1		
设计	Lai	2025.12	标准化		材料	PA66+GF		
					颜色	红色		
校对	Yang	2025.12			重量			
审核	Zhang	2025.12	比例	1:1	阶段标记	版次	01	
未注公差: XX.X ±0.2;					A	页数		

1 2 3 4 5 6 7 8