


NOTES:

- 1.Working temperature range: -40℃ TO +125℃.
- 2.UL Flame resistance rating:UL-94 V0
- 3.Good high and low temperature resistance, environmental hazardous substances meet ROHS requirements.

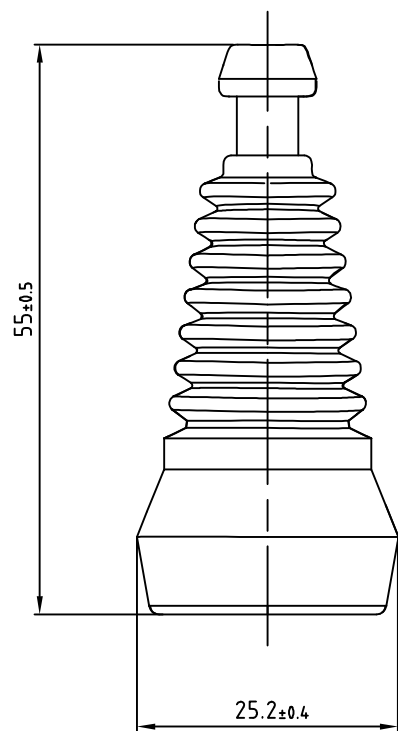

宁波翔沣电气有限公司

NINGBO XF ELECTRONIC CO.,LTD

Design	Lai	2025. 12	Revision	01	Color	Black	
Proofread	Yang	2025. 12			Weight Kg		
Approval	Zhang	2025. 12	Scale	2:1		Pages	