




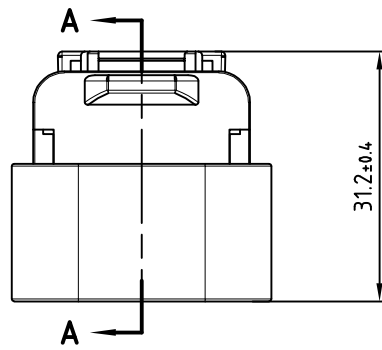
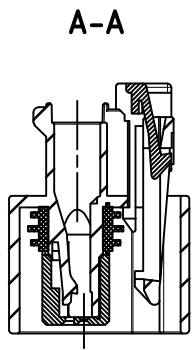


A
B
C
D
E
F

1 2 3 4 5 6 7 8

A
B
C
D
E
F

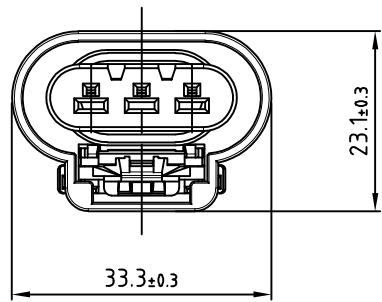

NOTES:

- 1.Working temperature range: -40℃ TO +125℃.
- 2.UL Flame resistance rating:UL-94 V2

 宁波翔沣电气有限公司 NINGBO XF ELECTRONIC CO.,LTD					Name		Connector	
					DrawingNo		XF7032-2.8-21Bk	
					Material		PA66+GF	
Design	Lai	2025.12	Revision	01	Color		Black	
Proofread	Yang	2025.12			Weight Kg			
Approval	Zhang	2025.12	Scale	1.5:1			Pages	

1 2 3 4 5 6 7 8