
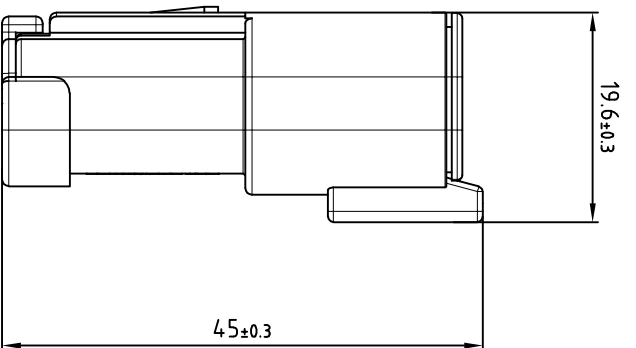
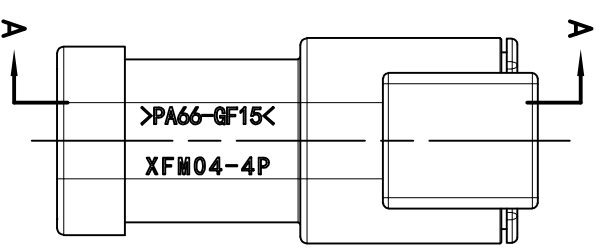
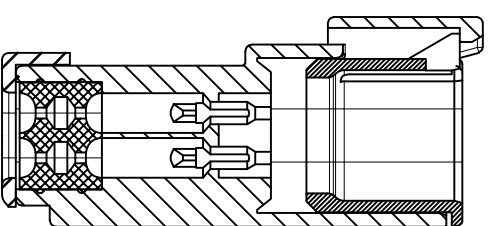



NOTES:

- 1.CURRENT RATING: 7.5A MAXIMUM.
 - 2.OPERATING TEMPERATURE: -40℃ TO +125℃.
 - 3.MOISTURE RESISTANCE:IP68,IP6K9K.
 - 4.UL Flame Resistance Rating:UL-94 V0
 - 5.Electrical characteristics:
Working voltage (VDC):250
Working voltage (VAC):250
- Rated voltage configuration V:12 | 24 | 48



NINGBO XINBO ELECTRONIC CO., LTD				Name		Connector	
NINGBO XINBO ELECTRONIC CO., LTD				Drawing No		XTM04-4P-E003	
NINGBO XINBO ELECTRONIC CO., LTD				Material		PA66+GF15	
NINGBO XINBO ELECTRONIC CO., LTD				Color		Grey	
NINGBO XINBO ELECTRONIC CO., LTD				Weight Kg			
NINGBO XINBO ELECTRONIC CO., LTD				Approval		Pages	
NINGBO XINBO ELECTRONIC CO., LTD				Zhang			
NINGBO XINBO ELECTRONIC CO., LTD				2025.7			
NINGBO XINBO ELECTRONIC CO., LTD				Scale		2:1	
NINGBO XINBO ELECTRONIC CO., LTD							