
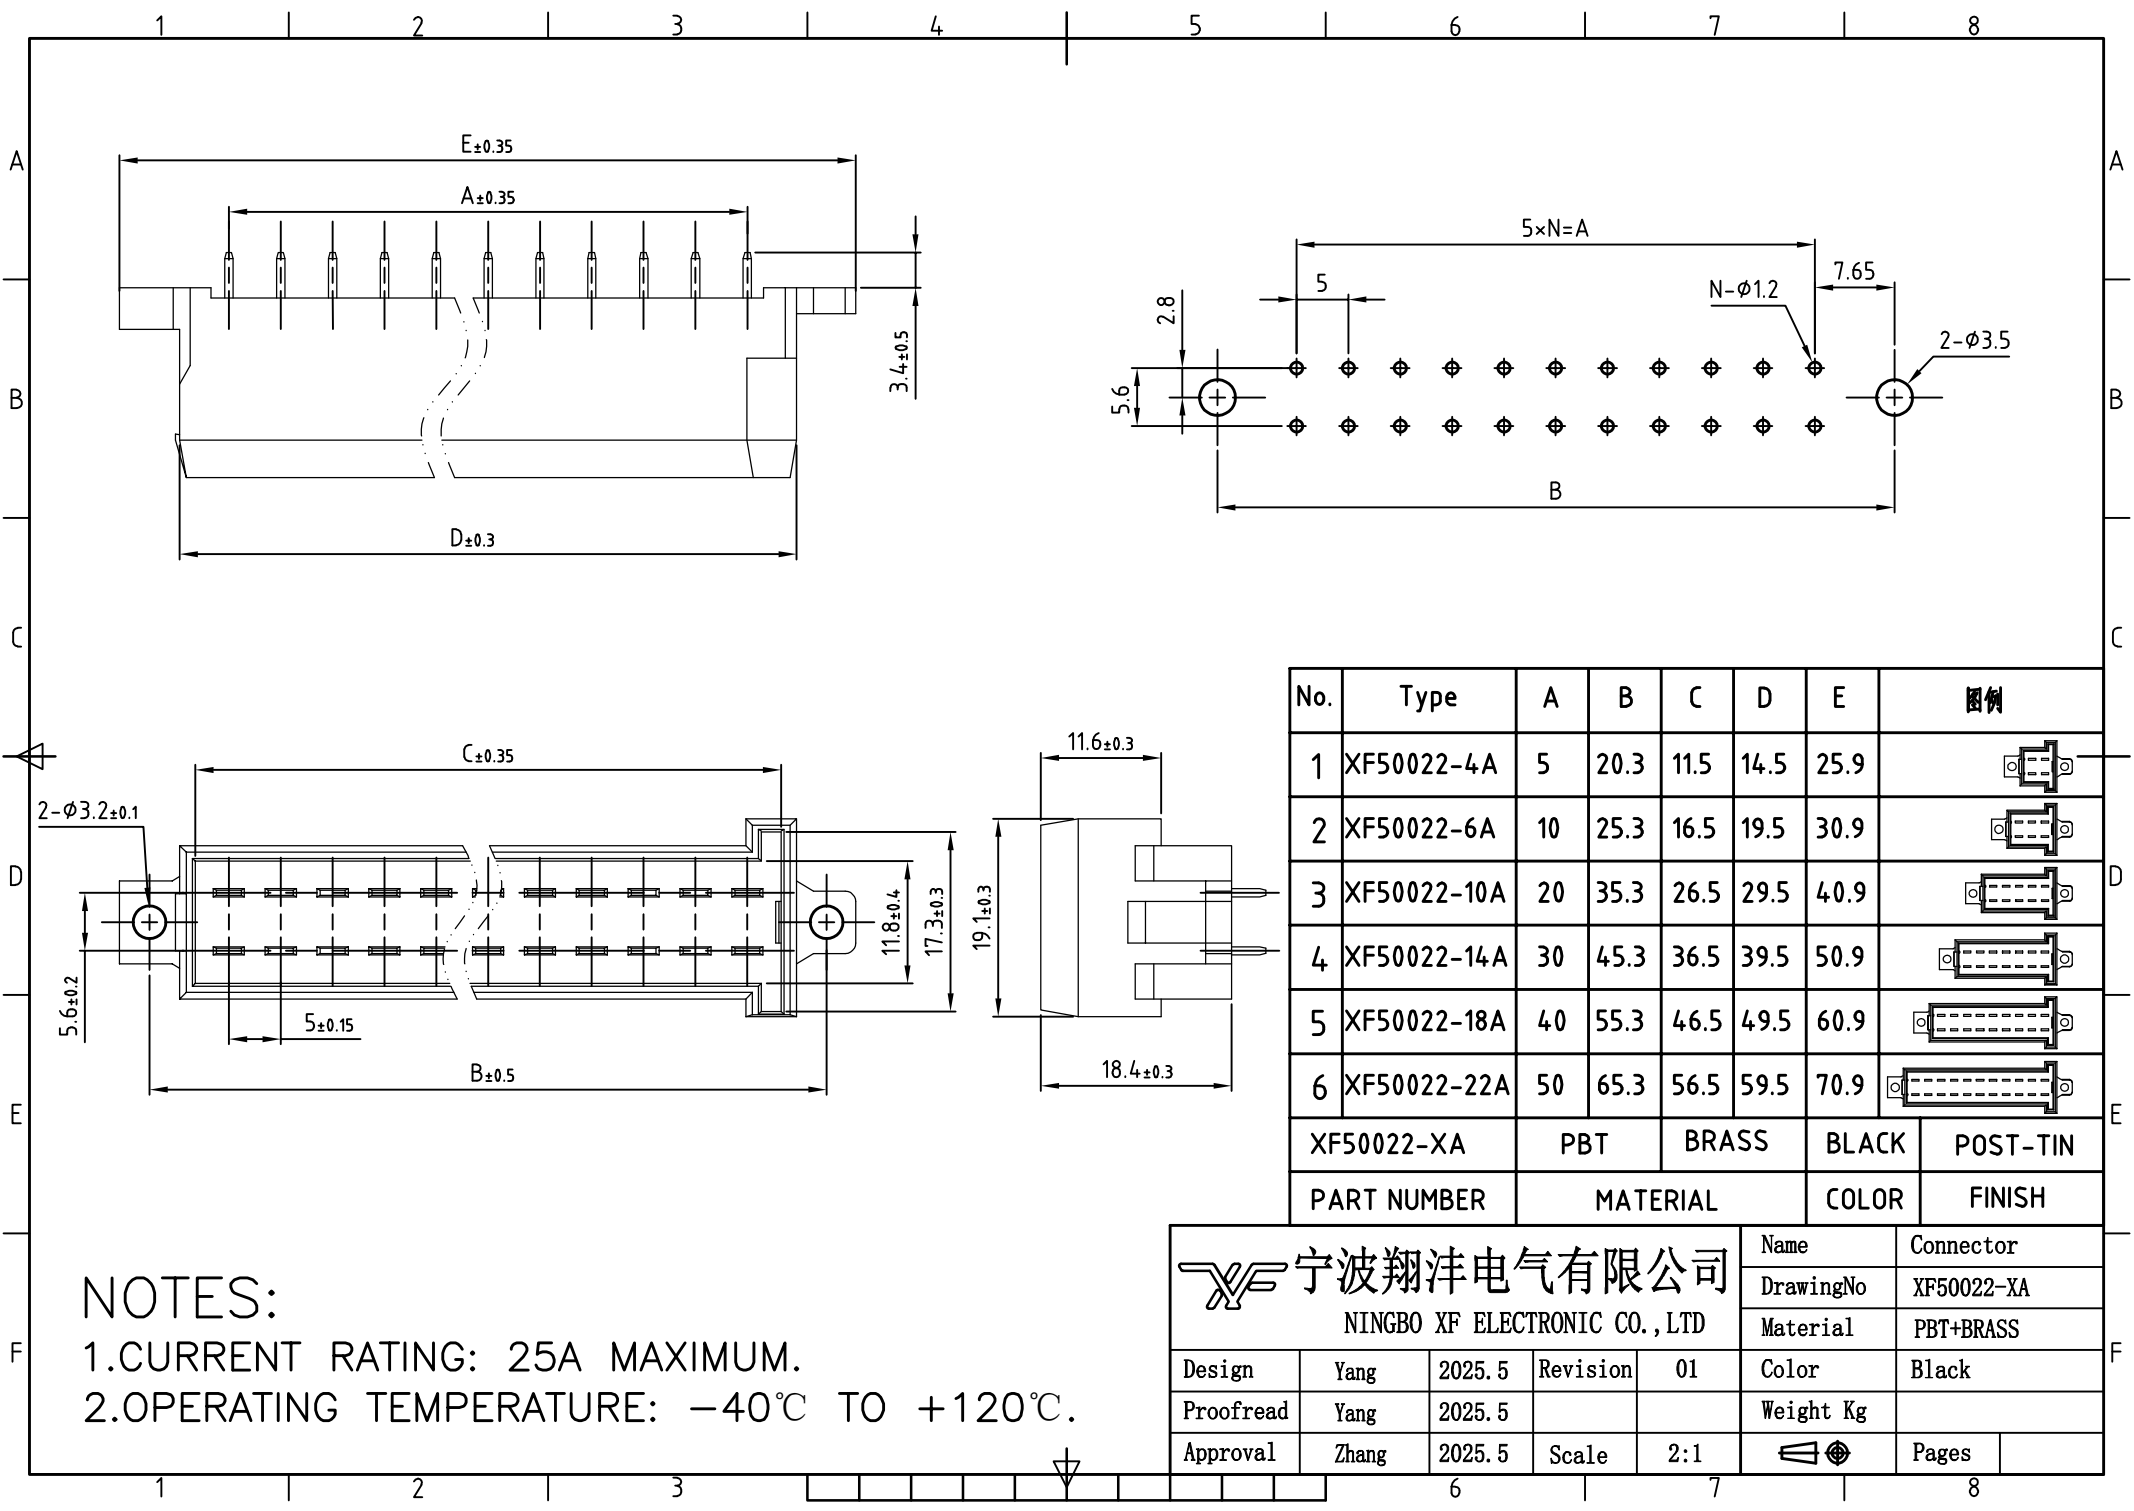




NOTES:

- 1.CURRENT RATING: 25A MAXIMUM.
- 2.OPERATING TEMPERATURE: -40℃ TO +120℃.

No.	Type	A	B	C	D	E	图例	
1	XF50022-4A	5	20.3	11.5	14.5	25.9		
2	XF50022-6A	10	25.3	16.5	19.5	30.9		
3	XF50022-10A	20	35.3	26.5	29.5	40.9		
4	XF50022-14A	30	45.3	36.5	39.5	50.9		
5	XF50022-18A	40	55.3	46.5	49.5	60.9		
6	XF50022-22A	50	65.3	56.5	59.5	70.9		
XF50022-XA		PBT		BRASS		BLACK	POST-TIN	
PART NUMBER		MATERIAL				COLOR	FINISH	

宁波翔沣电气有限公司

NINGBO XF ELECTRONIC CO.,LTD

Design	Yang	2025.5	Revision	01	Name	Connector
Proofread	Yang	2025.5			DrawingNo	XF50022-XA
Approval	Zhang	2025.5	Scale	2:1	Material	PBT+BRASS
					Color	Black
					Weight Kg	
					Pages	