


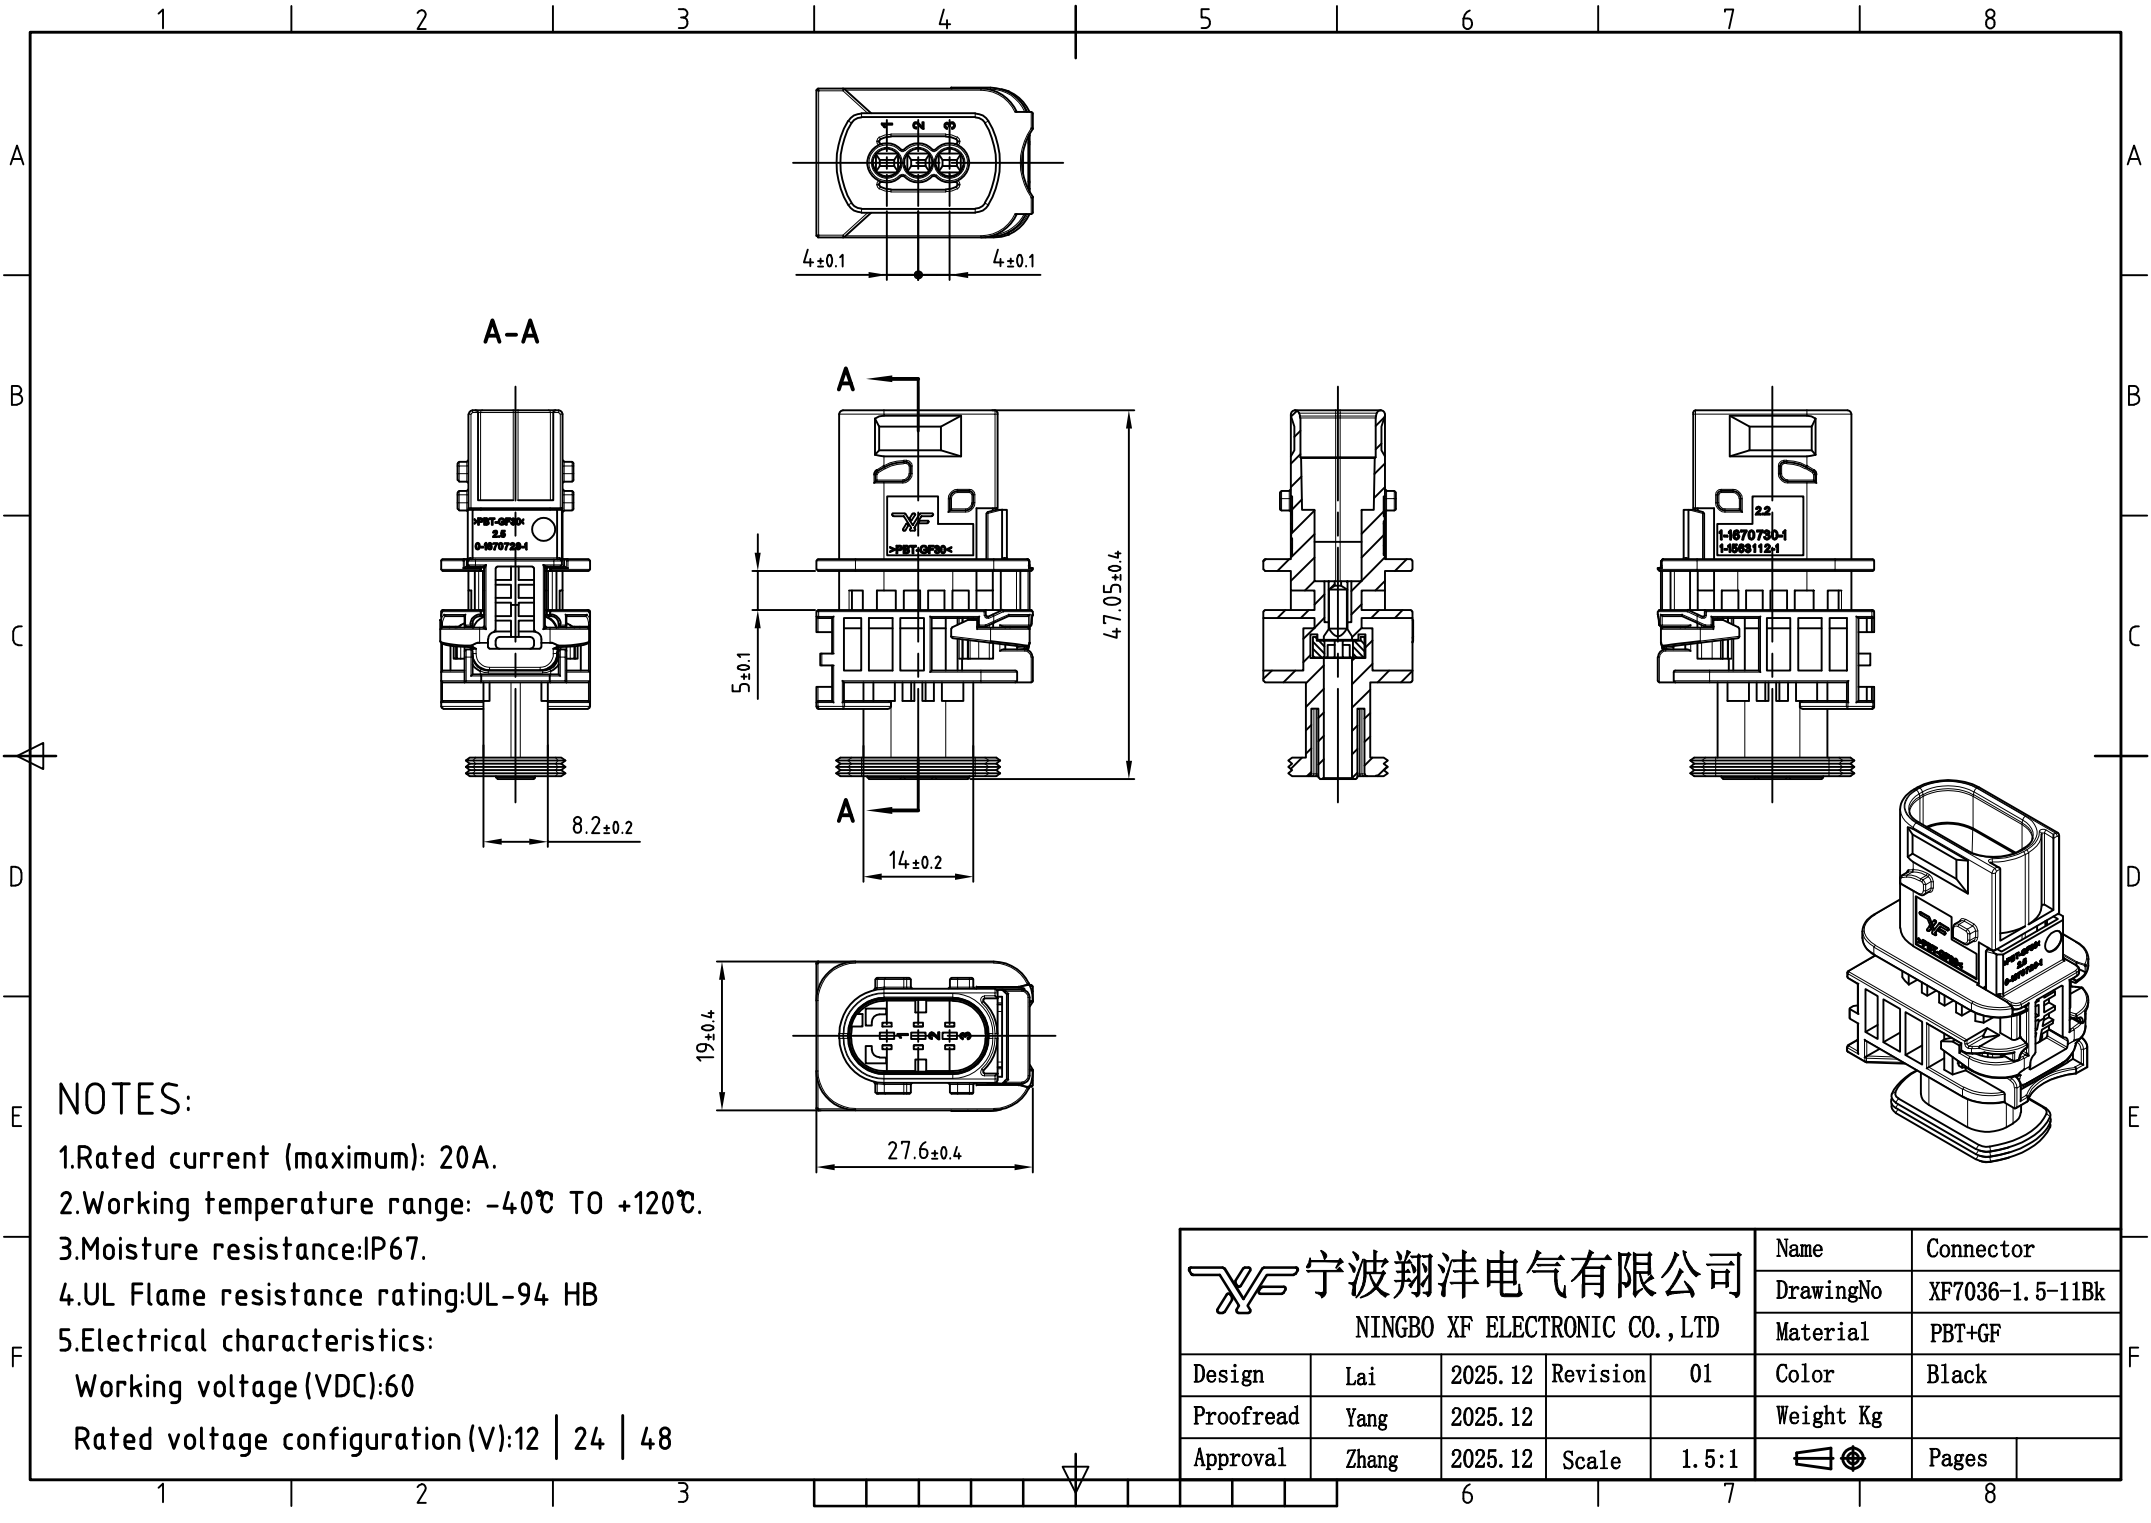

NOTES:

- 1.Rated current (maximum): 20A.
- 2.Working temperature range: -40℃ TO +120℃.
- 3.Moisture resistance:IP67.
- 4.UL Flame resistance rating:UL-94 HB
- 5.Electrical characteristics:
Working voltage(VDC):60
Rated voltage configuration(V):12 | 24 | 48

 宁波翔沅电气有限公司 NINGBO XF ELECTRONIC CO.,LTD					Name	Connector	
					DrawingNo	XF7036-1.5-11Bk	
					Material	PBT+GF	
Design	Lai	2025.12	Revision	01	Color	Black	
Proofread	Yang	2025.12			Weight Kg		
Approval	Zhang	2025.12	Scale	1.5:1		Pages	