

A

B

C

D

E

F

A


B

C







D

E

F



A-A

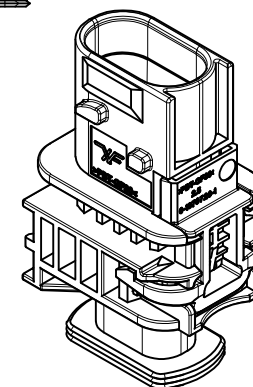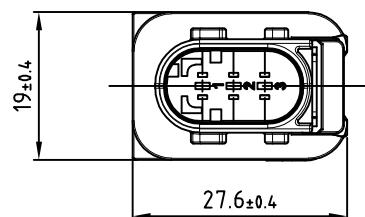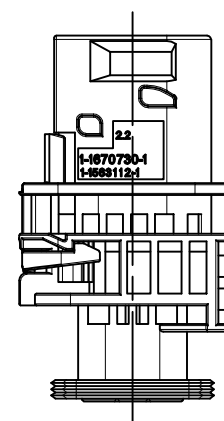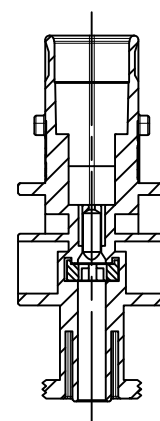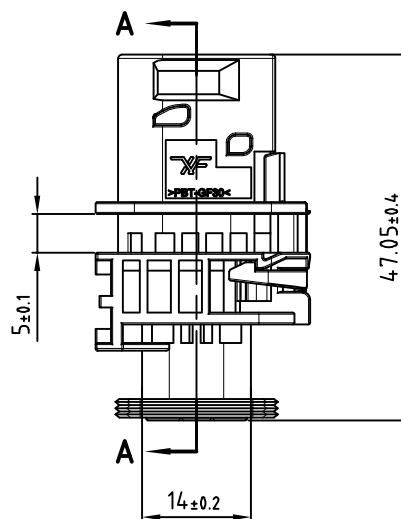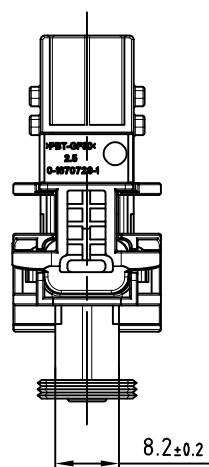

NOTES:

- 1.Rated current (maximum): 20A.
- 2.Working temperature range: -40℃ TO +120℃.
- 3.Moisture resistance:IP67.
- 4.UL Flame resistance rating:UL-94 HB
- 5.Electrical characteristics:
Working voltage (VDC):60
Rated voltage configuration (V):12 | 24 | 48

宁波翔洋电气有限公司
NINGBO XF ELECTRONIC CO.,LTD

Design	Lai	2025. 12	Revision	01	Name	Connector	
					DrawingNo	XF7036-1.5-11Gr	
					Material	PBT+GF	
Proofread	Yang	2025. 12			Color	Grey	
Approval	Zhang	2025. 12	Scale	1.5:1	Weight Kg		
					Pages		