
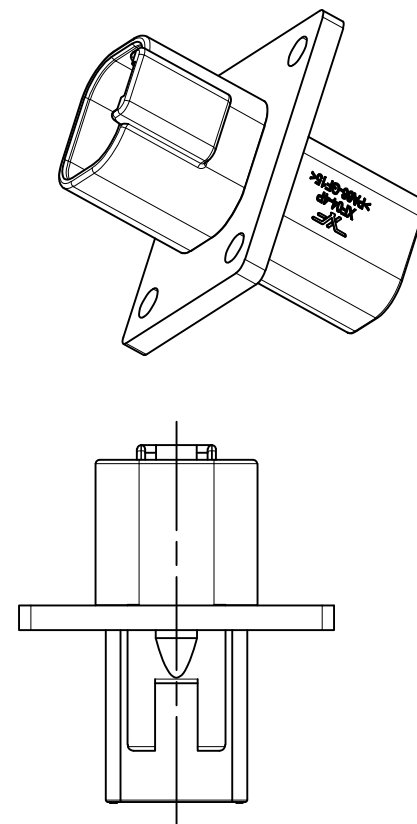
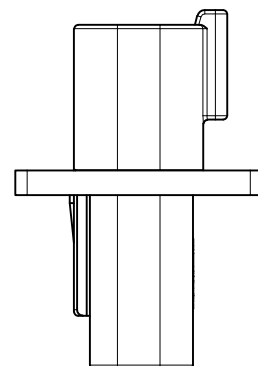
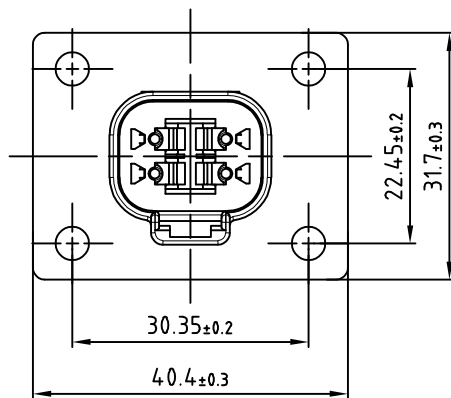
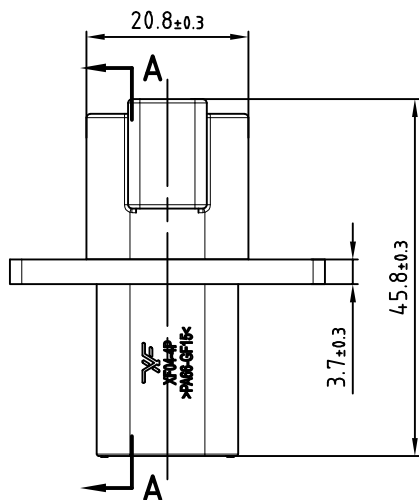
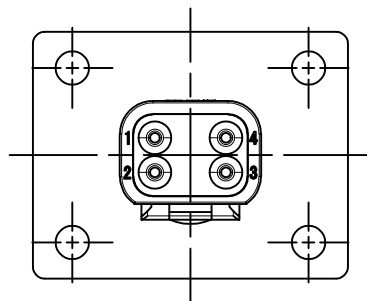


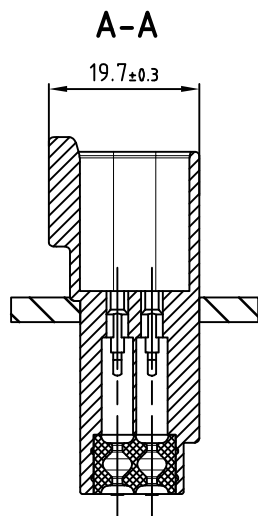

NOTES:

- 1.CURRENT RATING: 13A MAXIMUM.
- 2.OPERATING TEMPERATURE: -40℃ TO +125℃.
- 3.MOISTURE RESISTANCE:IP68,IP6K9K.
- 4.UL Flame Resistance Rating:UL-94 V0
- 5.Electrical characteristics:
Working voltage (VDC):250
Working voltage (VAC):250
Rated voltage configuration V):12 | 24 | 48

宁波翔沅电气有限公司
NINGBO XF ELECTRONIC CO.,LTD

Design	Lai	2025.5	Revision	01	Name	Connector
Proofread	Yang	2025.5			DrawingNo	XT04-4P-LE14
Approval	Zhang	2025.5	Scale	1.5:1	Material	PA66+GF15
					Color	Black
					Weight Kg	
					Pages	