

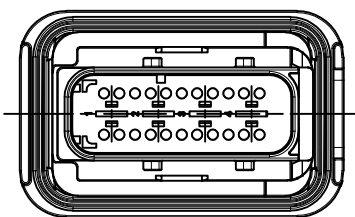


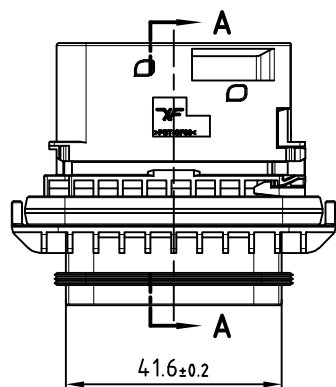



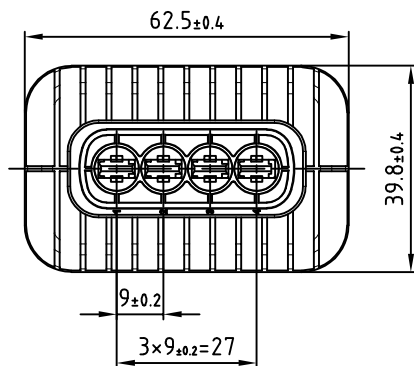

NOTES:

- 1.Rated current (maximum): 40A.
- 2.Working temperature range: -40℃ TO +120℃.
- 3.Moisture resistance:IP67,IP69K.
- 4.UL Flame resistance rating:UL-94 HB
- 5.Electrical characteristics:
Working voltage(VDC):60
Rated voltage configuration (V):12

 宁波翔沣电气有限公司
NINGBO XF ELECTRONIC CO.,LTD

 宁波翔沅电气有限公司 NINGBO XF ELECTRONIC CO., LTD					Name	Connector		
					DrawingNo	XF7041-6. 3-11BkS		
					Material	PBT+GF30		
Design	Lai	2026. 1	Revision	01	Color	Black		
Proofread	Yang	2026. 1			Weight Kg			
Approval	Zhang	2026. 1	Scale	1:1		Pages		