
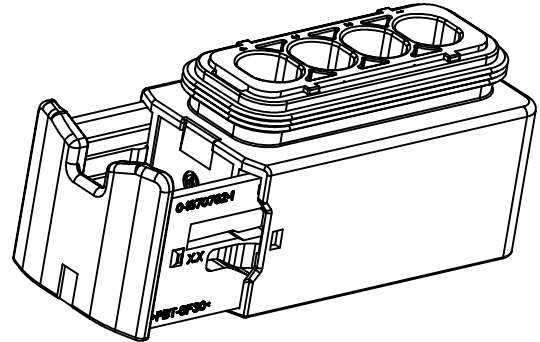
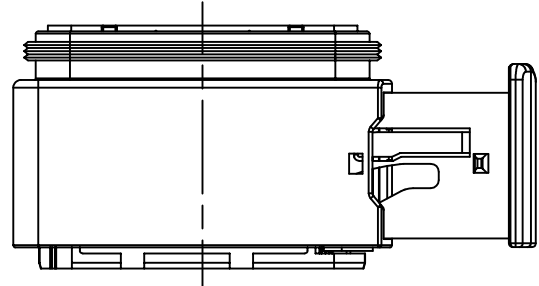
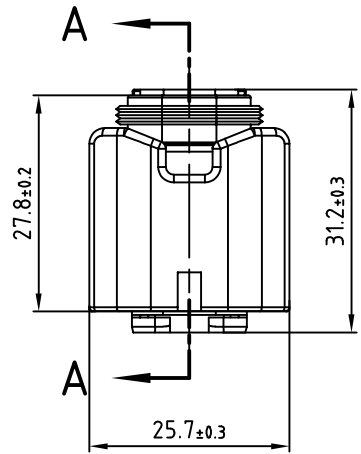


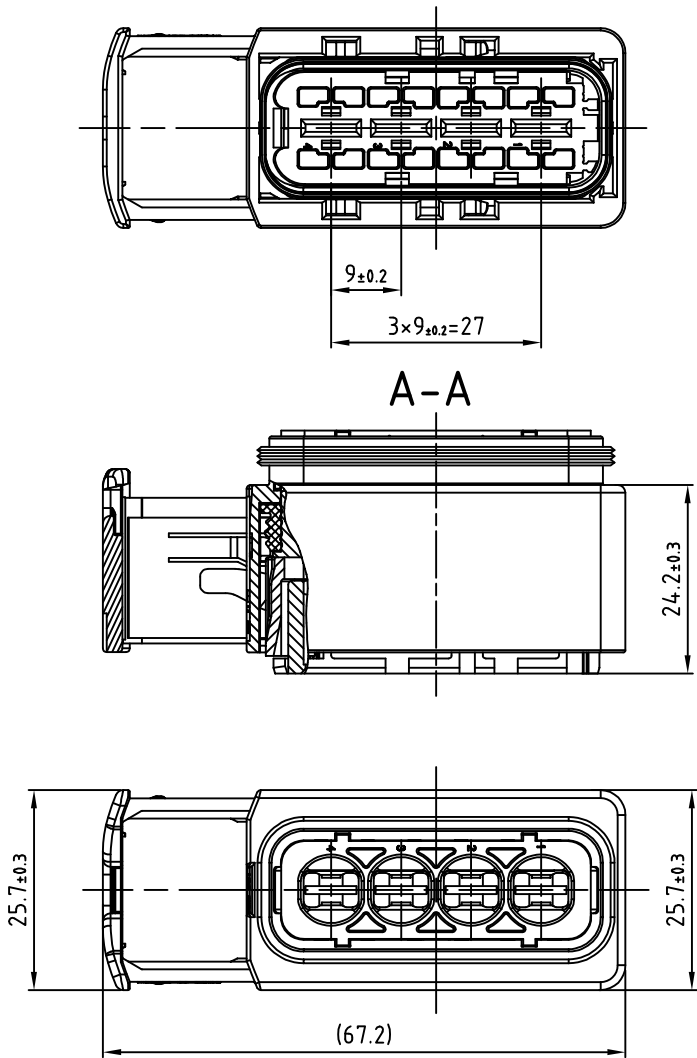

NOTES:

- Rated current (maximum): 40A.
- Working temperature range: -40°C TO $+140^{\circ}\text{C}$.
- Moisture resistance: IP67.
- UL Flame resistance rating: UL-94 V0
- Electrical characteristics:
Working voltage (VDC): 60
Rated voltage configuration (V): 12 | 24 | 48

 宁波翔沣电气有限公司 NINGBO XF ELECTRONIC CO.,LTD					Name	Connector	
					DrawingNo	XF7041-6.3-21Blu	
					Material	PBT+GF30	
Design	Yang	2025.7	Revision	01	Color	Blue	
Proofread	Yang	2025.7			Weight Kg		
Approval	Zhang	2025.7	Scale	1.5:1		Pages	