


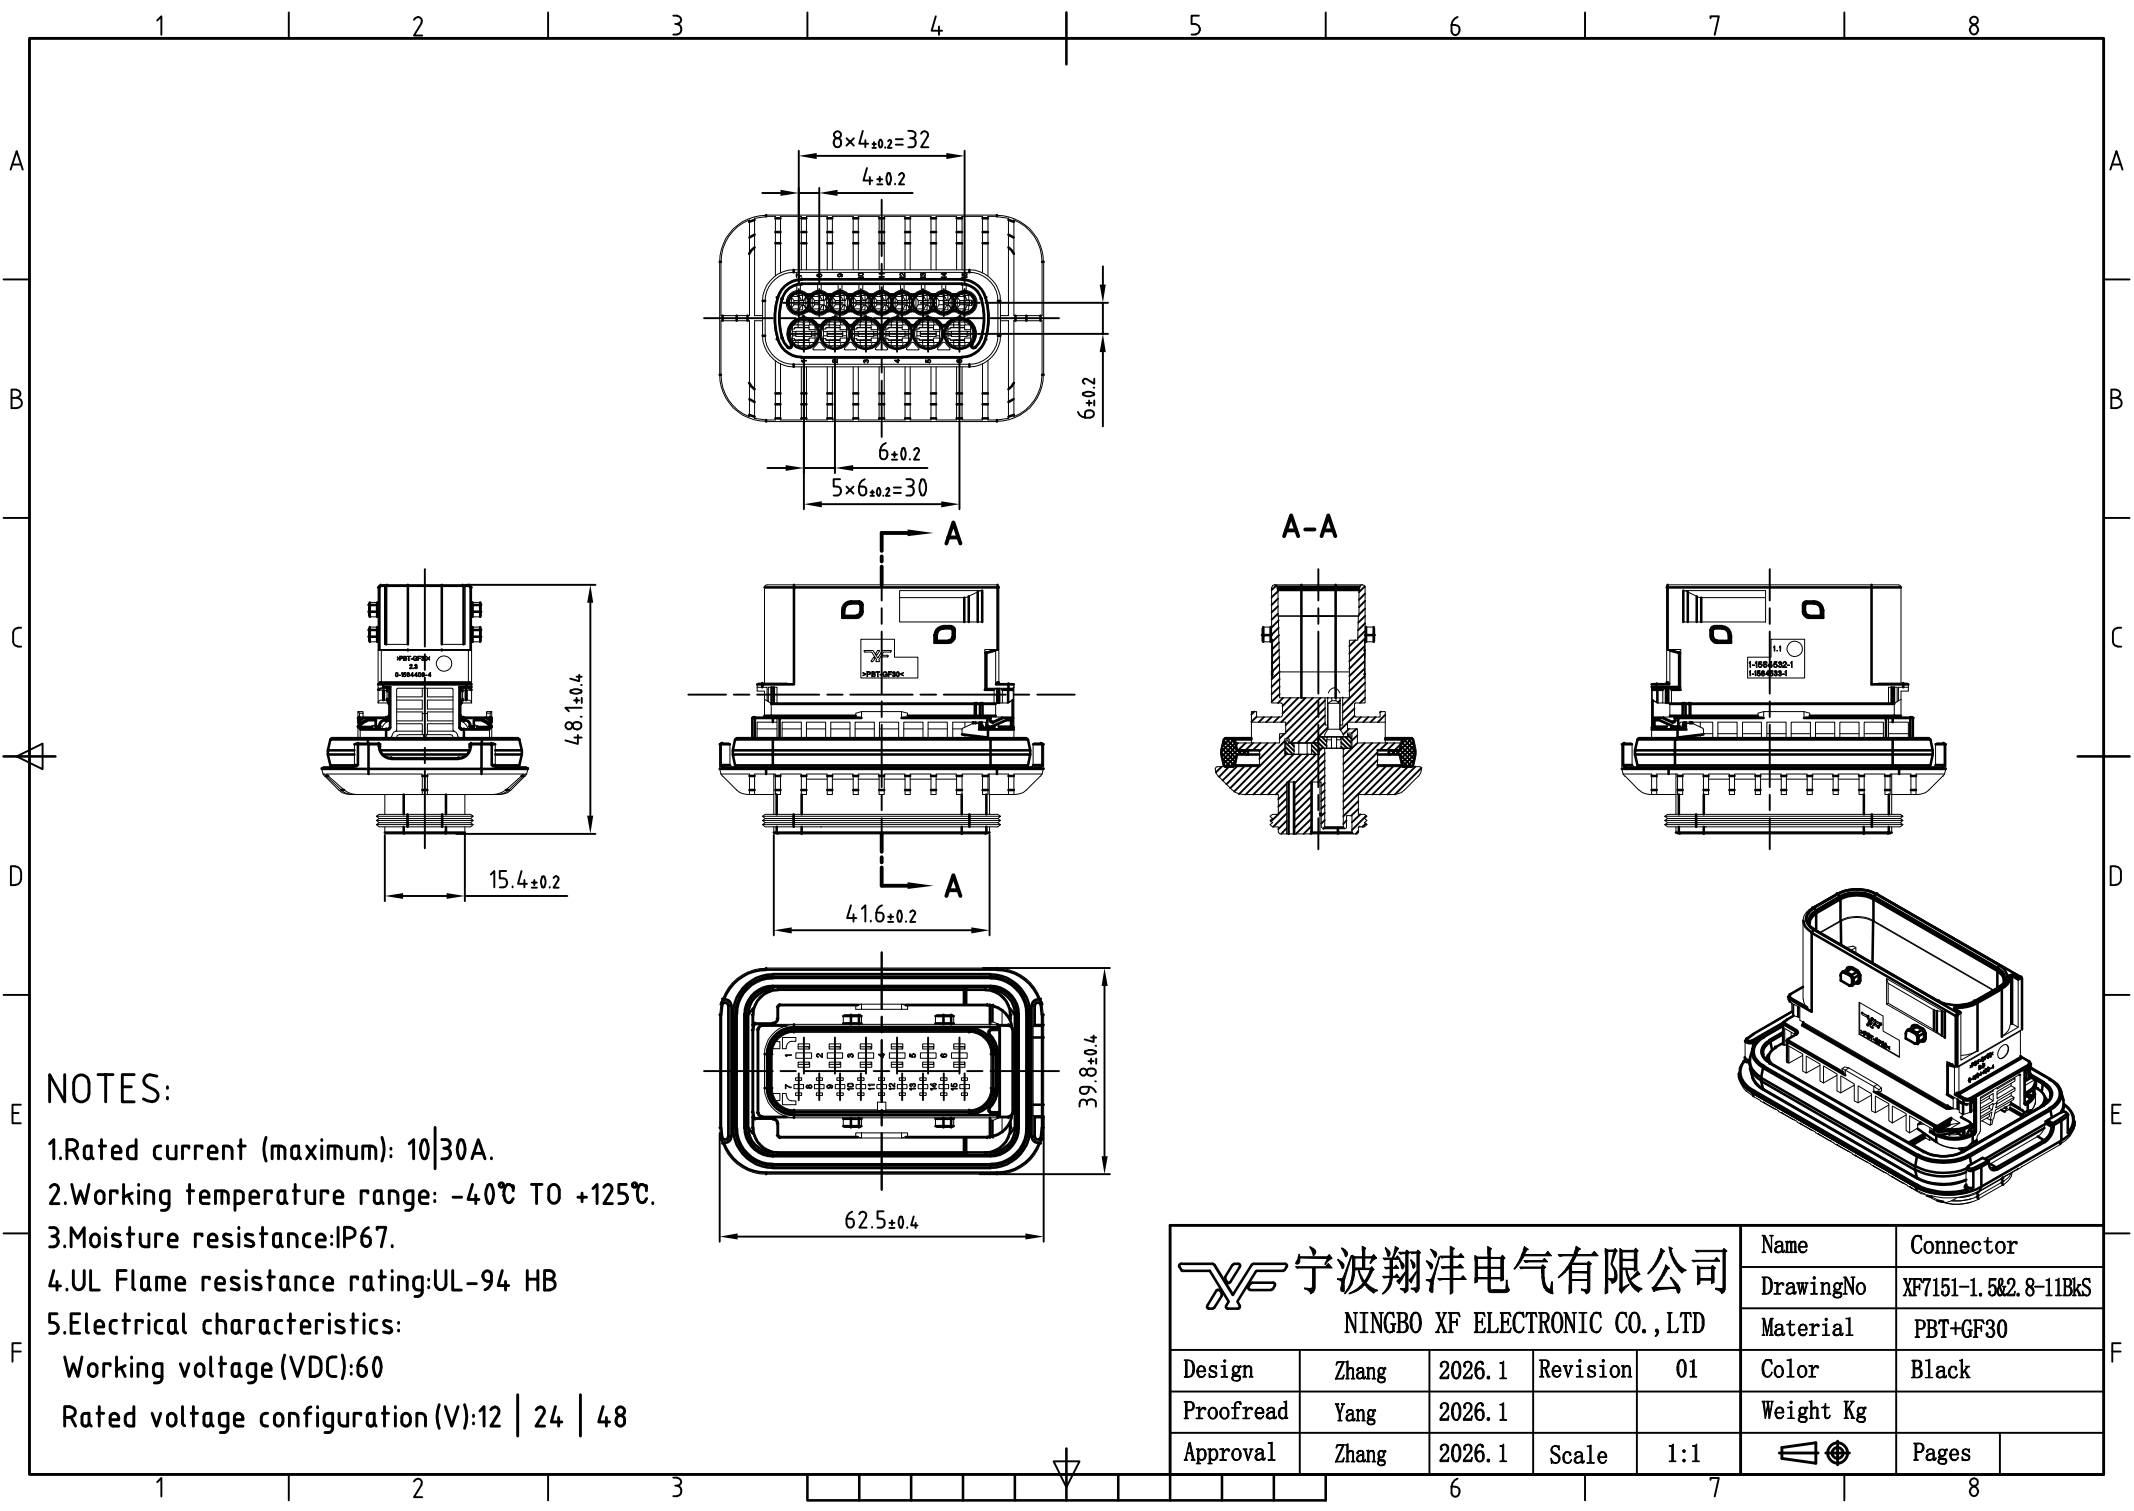

NOTES:

- 1.Rated current (maximum): 10|30A.
- 2.Working temperature range: -40℃ TO +125℃.
- 3.Moisture resistance:IP67.
- 4.UL Flame resistance rating:UL-94 HB
- 5.Electrical characteristics:
Working voltage (VDC):60
Rated voltage configuration (V):12 | 24 | 48

 宁波翔沅电气有限公司 NINGBO XF ELECTRONIC CO.,LTD					Name	Connector	
					DrawingNo	XF7151-1.5&2.8-11B&S	
					Material	PBT+GF30	
Design	Zhang	2026.1	Revision	01	Color	Black	
Proofread	Yang	2026.1			Weight Kg		
Approval	Zhang	2026.1	Scale	1:1		Pages	