


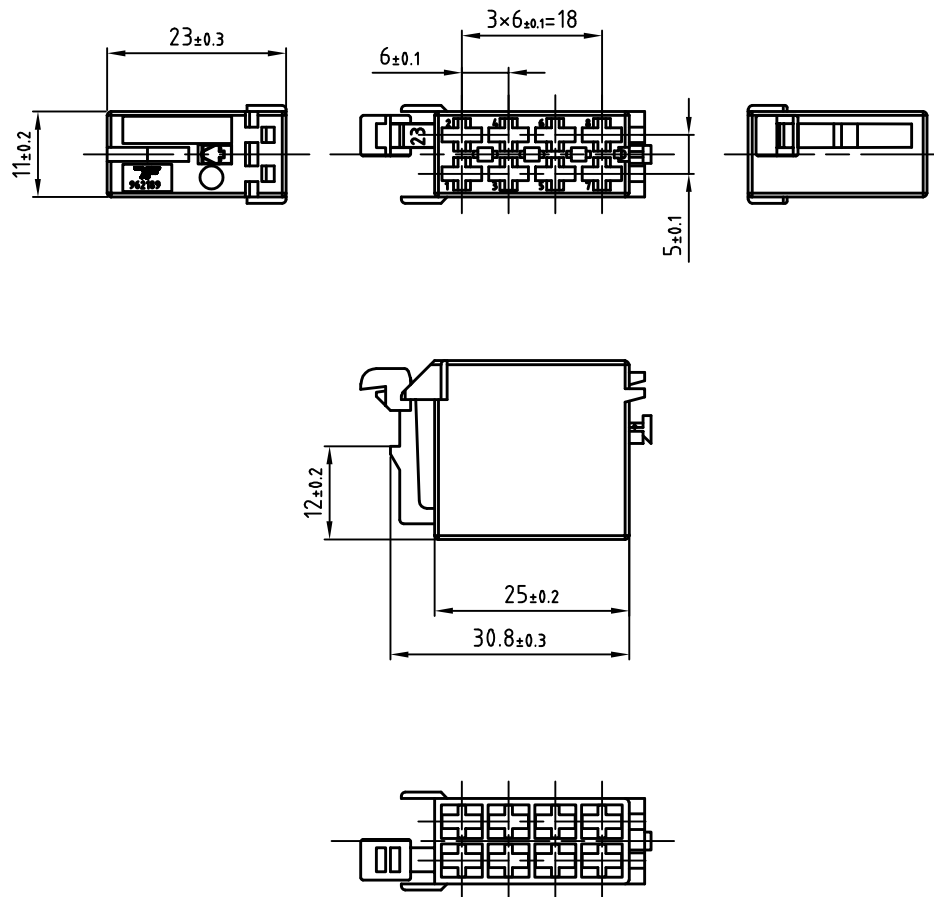

NOTES:

- 1.Rated current (maximum): 30A.
- 2.Working temperature range: -40℃ TO +125℃.
- 3.UL Flame resistance rating:UL-94 HB
- 4.Electrical characteristics:

Rated voltage configuration (V):12 | 24

 宁波翔沣电气有限公司 NINGBO XF ELECTRONIC CO.,LTD					Name		Connector	
					DrawingNo		XF7085-2. 8-21Gr	
					Material		PBT	
Design	Yang	2026. 1	Revision	01	Color		Gray	
Proofread	Yang	2026. 1			Weight Kg			
Approval	Zhang	2026. 1	Scale	1. 5:1			Pages	