

A

B

C

D

E

F

A

B






C

D

E

F

A-A

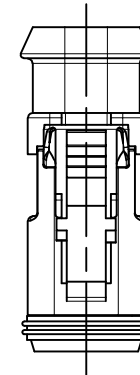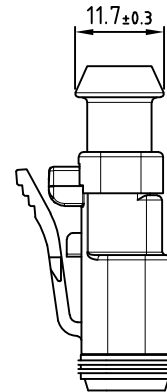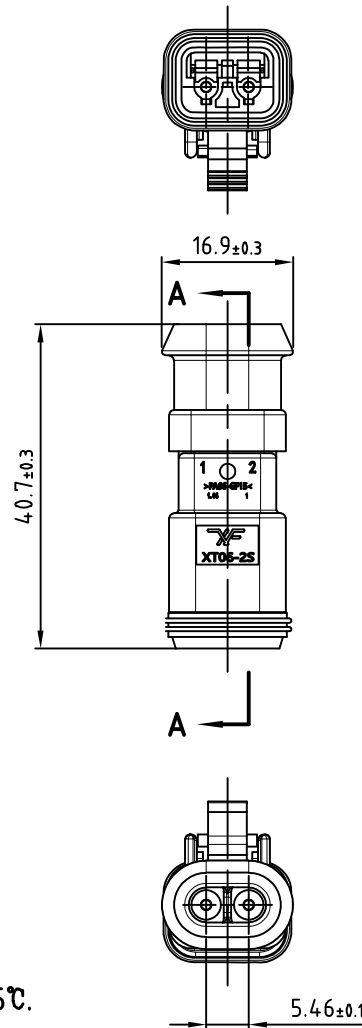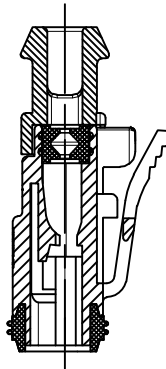

NOTES:

- 1.Rated current (maximum): 13A.
- 2.Working temperature range: -40°C TO $+125^{\circ}\text{C}$.
- 3.Moisture resistance:IP68,IP6K9K.
- 4.UL Flame resistance rating:UL-94 V0
- 5.Electrical characteristics:
Working voltage (VDC):250
Working voltage (VAC):250
Rated voltage configuration (V):12 | 24 | 48

 宁波翔沣电气有限公司
NINGBO XF ELECTRONIC CO.,LTD

 宁波翔沣电气有限公司 NINGBO XF ELECTRONIC CO.,LTD					Name	Connector	
					DrawingNo	XT06-2S-CE13	
					Material	PA66+GF15	
Design	Lai	2026.1	Revision	01	Color	Black	
Proofread	Yang	2026.1			Weight Kg		
Approval	Zhang	2026.1	Scale	1.5:1		Pages	