



A
B
C
D
E
F


1 2 3 4 5 6 7 8

A
B
C
D
E
F




A-A

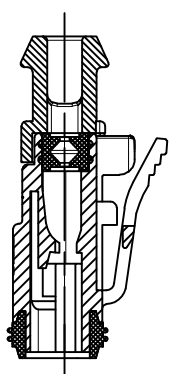

16.9±0.3






40.7±0.3



5.46±0.1

11.7±0.3

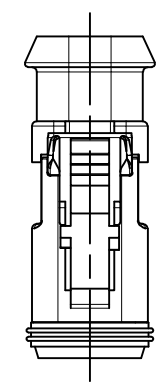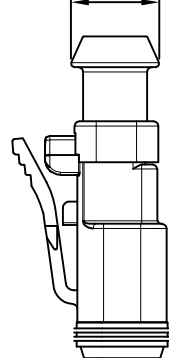

注:

- 1、端子额定电流 (最大值) (A):13A
- 2、工作温度:-40℃~125℃
- 3、防水:IP68、IP6K9K
- 4、UL阻燃性等级:UL-94 V0
- 5、电气特征:工作电压 (VDC):250

工作电压 (VAC):250

标称电压架构 (V):12|24|48

 宁波翔沅电气有限公司 NINGBO XF ELECTRONIC CO., LTD					名称	连接件		
					型号	XT06-2S-CE13		
					材料	PA66+GF15		
设计	Lai	2026.1	标准化		颜色	黑色		
校对	Yang	2026.1			重量			
审核	Zhang	2026.1	比例	1.5:1	阶段标记		版次	01
未注公差: XX.X ±0.2;					A		页数	

1 2 3 4 5 6 7 8