


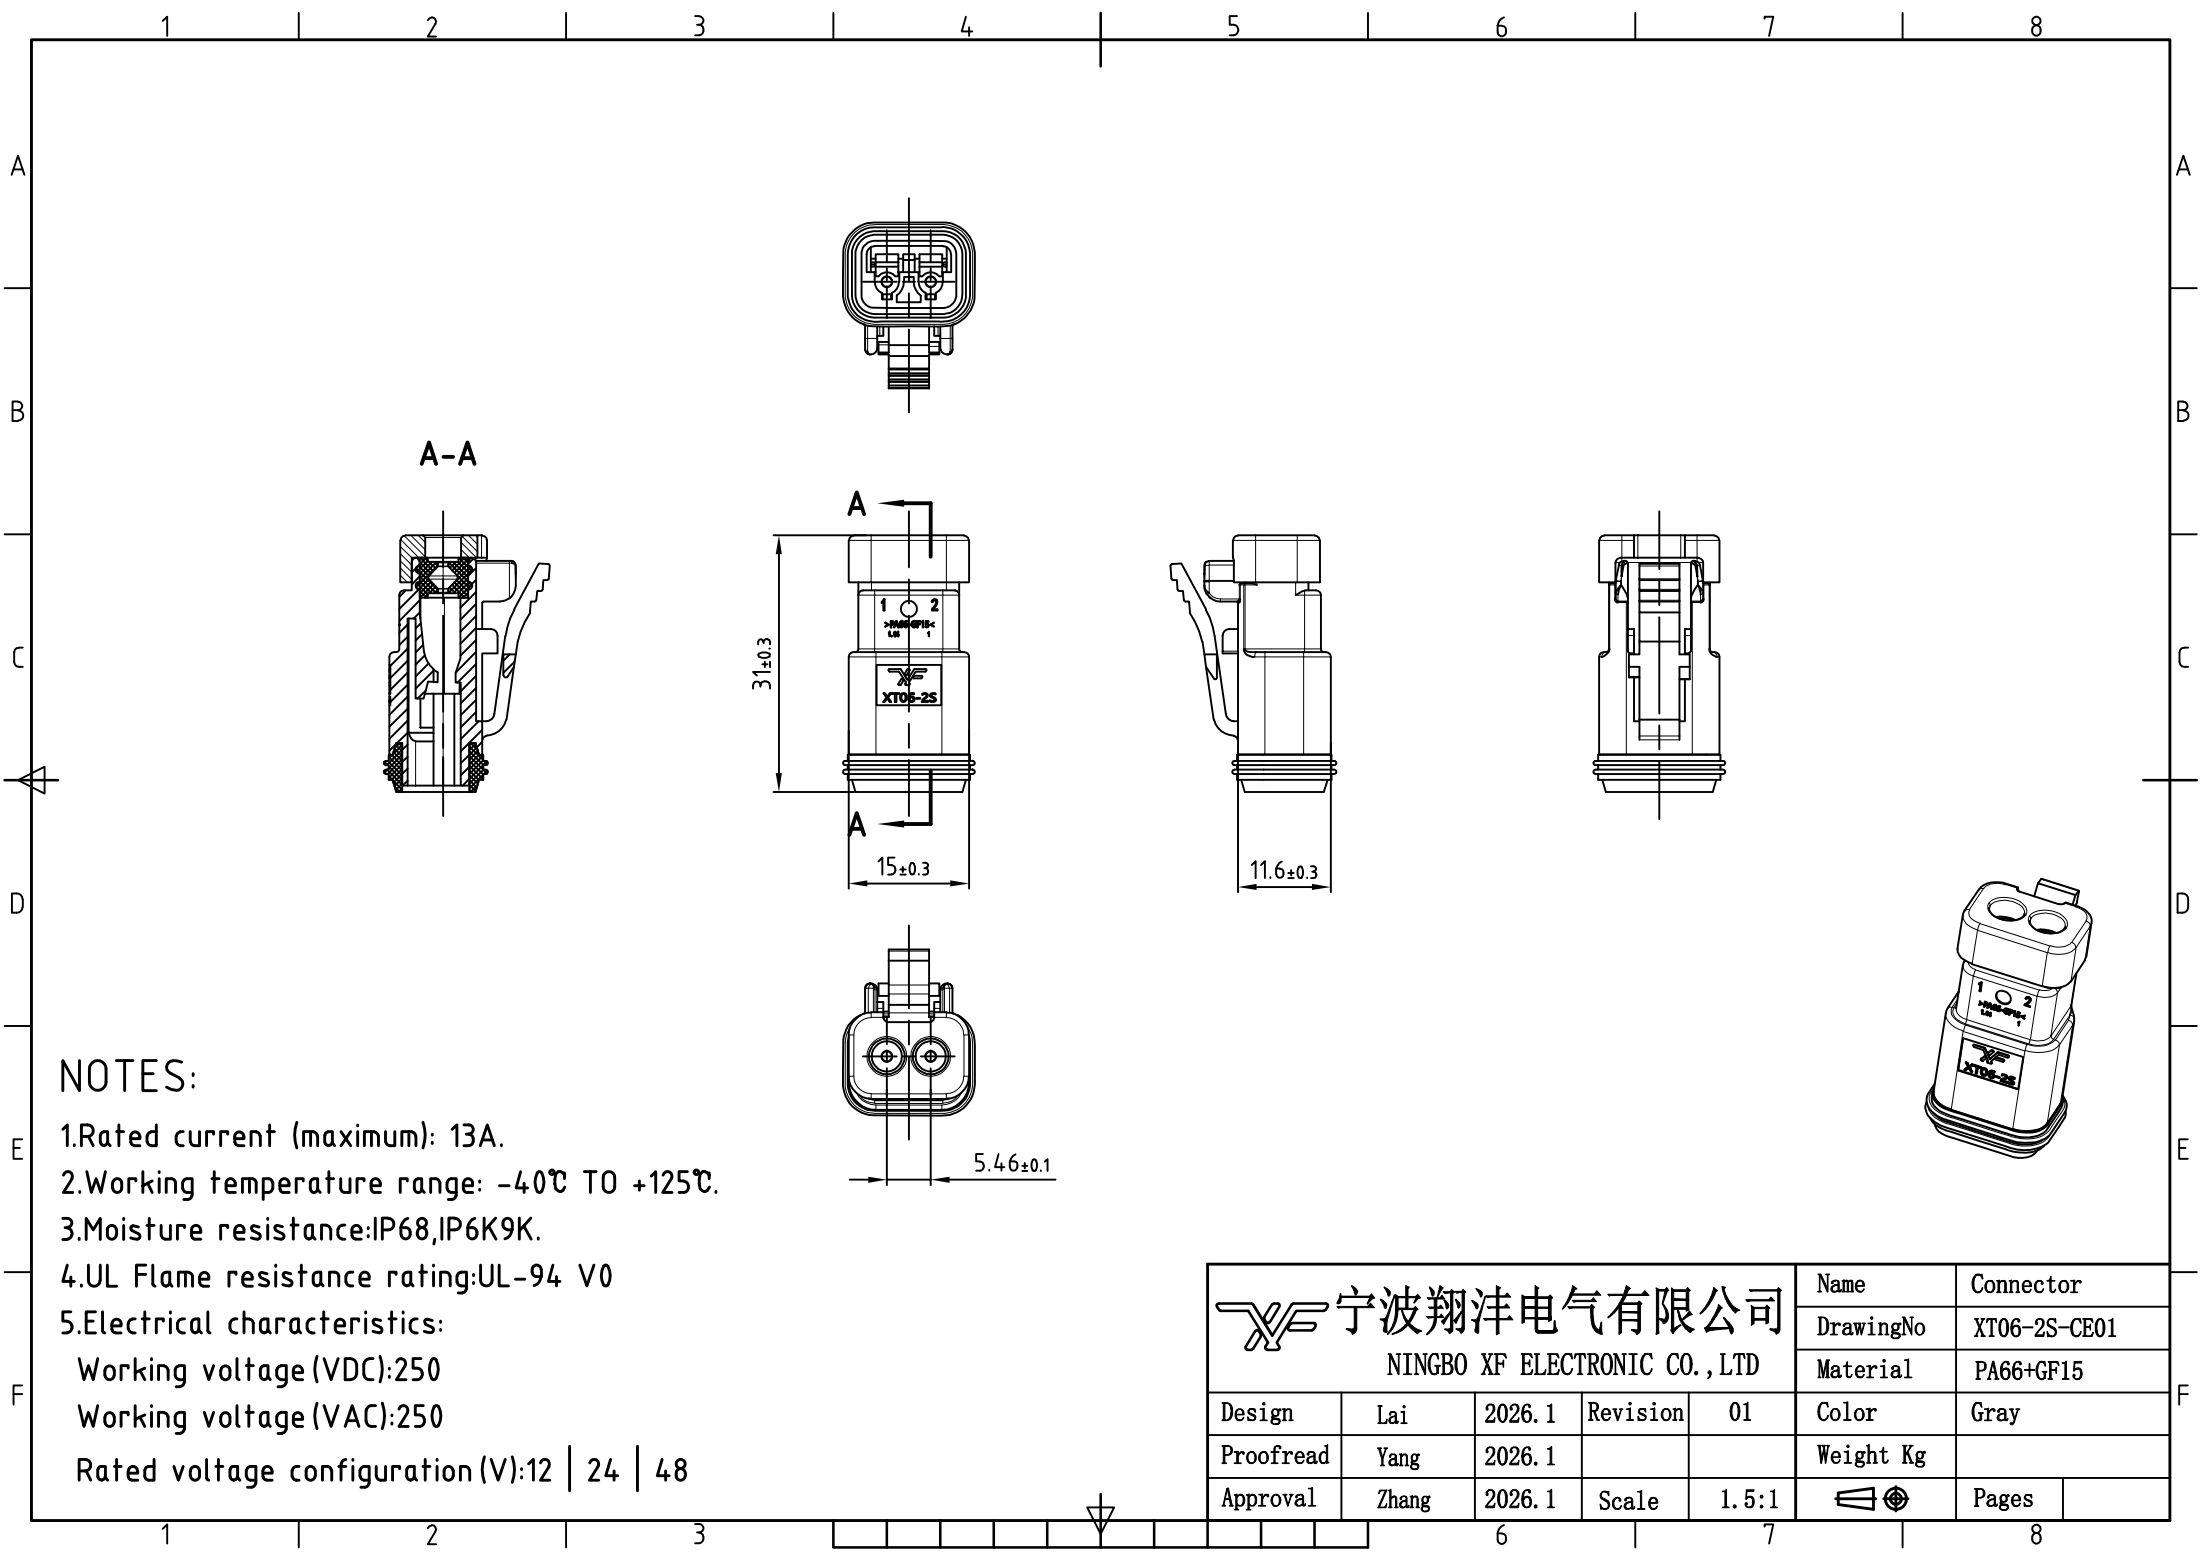

NOTES:

1.Rated current (maximum): 13A.

2.Working temperature range: -40°C TO $+125^{\circ}\text{C}$.

3.Moisture resistance:IP68,IP6K9K.

4.UL Flame resistance rating:UL-94 V0

5.Electrical characteristics:

Working voltage (VDC):250

Working voltage (VAC):250

Rated voltage configuration (V):12 | 24 | 48

 宁波翔沣电气有限公司 NINGBO XF ELECTRONIC CO.,LTD					Name	Connector	
					DrawingNo	XT06-2S-CE01	
					Material	PA66+GF15	
Design	Lai	2026. 1	Revision	01	Color	Gray	
Proofread	Yang	2026. 1			Weight Kg		
Approval	Zhang	2026. 1	Scale	1. 5:1		Pages	