


A
B
C
D
E
F

1 2 3 4 5 6 7 8

A
B
C
D
E
F

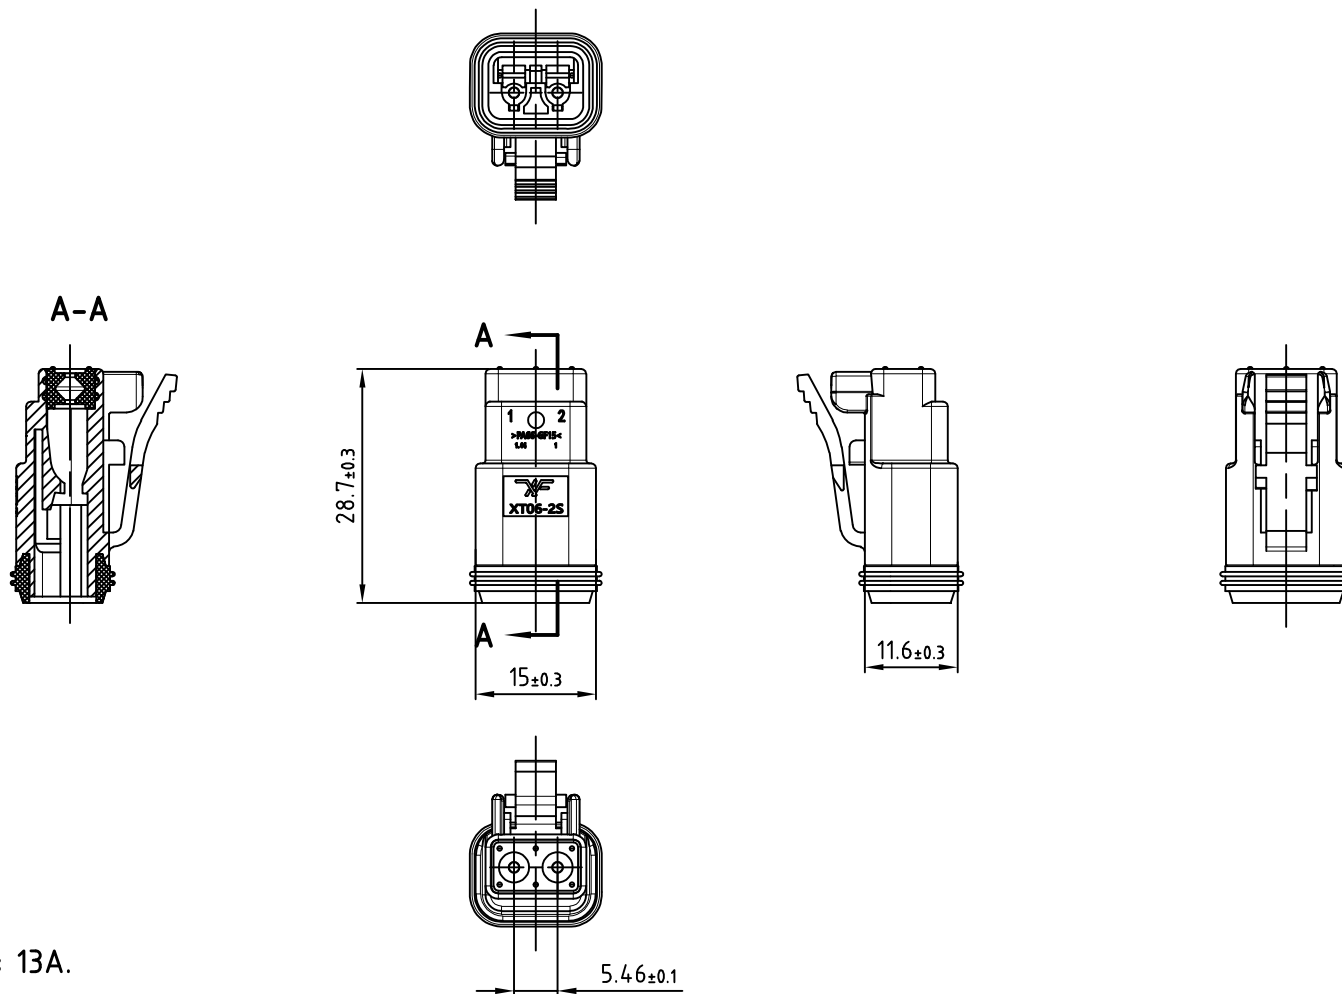

NOTES:

1.Rated current (maximum): 13A.

2.Working temperature range: -40℃ TO +125℃.

3.Moisture resistance:IP68,IP6K9K.

4.UL Flame resistance rating:UL-94 V0

5.Electrical characteristics:

Working voltage (VDC):250

Working voltage (VAC):250

Rated voltage configuration (V):12 | 24 | 48

 宁波翔沣电气有限公司 NINGBO XF ELECTRONIC CO.,LTD					Name	Connector	
					DrawingNo	XT06-2S-P012	
					Material	PA66+GF15	
Design	Lai	2026. 1	Revision	01	Color	Black	
Proofread	Yang	2026. 1			Weight Kg		
Approval	Zhang	2026. 1	Scale	1. 5:1		Pages	

1 2 3 4 5 6 7 8