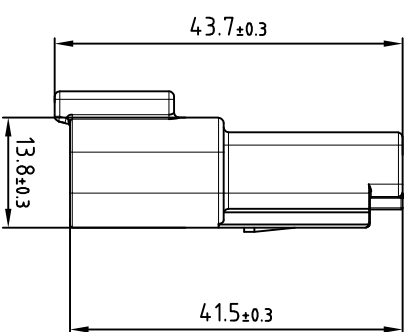



## NOTES:

- 1.CURRENT RATING: 13A MAXIMUM.
  - 2.OPERATING TEMPERATURE: -40°C TO +125°C.
  - 3.MOISTURE RESISTANCE:IP68,IP6K9K.
  - 4.UL Flame Resistance Rating:UL-94 V0
  - 5.Electrical characteristics:  
Working voltage (VDC):250  
Working voltage (VAC):250
- Rated voltage configuration V):12 | 24 | 48

|                               |       |         |          |       |                                                                                   |  |           |  |
|-------------------------------|-------|---------|----------|-------|-----------------------------------------------------------------------------------|--|-----------|--|
| NINGBO XF ELECTRONIC CO., LTD |       |         |          |       | Name                                                                              |  | Connector |  |
| NINGBO XF ELECTRONIC CO., LTD |       |         |          |       | DrawingNo                                                                         |  | XT04-2P   |  |
|                               |       |         |          |       | Material                                                                          |  | PA66+GF15 |  |
| Design                        | Yang  | 2025. 4 | Revision | 01    | Color                                                                             |  | Grey      |  |
| Proofread                     | Yang  | 2025. 4 |          |       | Weight Kg                                                                         |  |           |  |
| Approval                      | Zhang | 2025. 4 | Scale    | 1.5:1 |  |  | Pages     |  |