


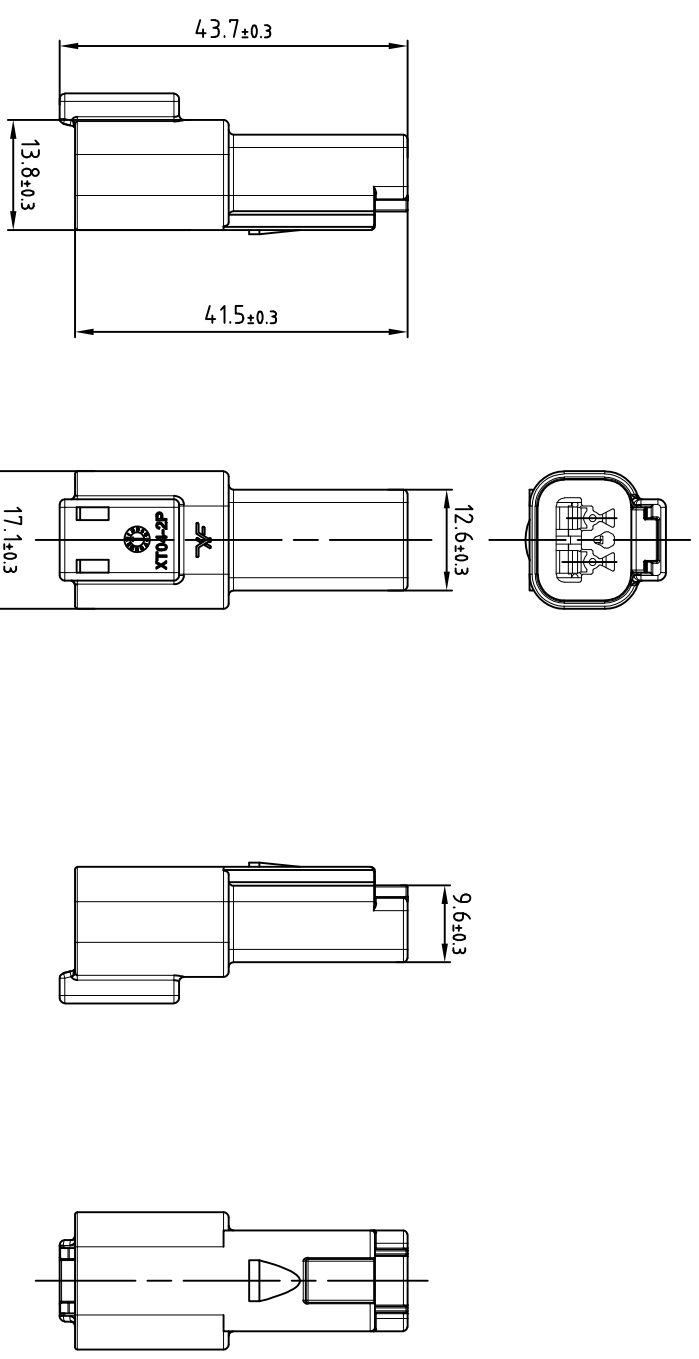

NOTES:

- 1.CURRENT RATING: 13A MAXIMUM.
  - 2.OPERATING TEMPERATURE: -40℃ TO +125℃.
  - 3.MOISTURE RESISTANCE:IP68,IP6K9K.
  - 4.UL Flame Resistance Rating:UL-94 V0
  - 5.Electrical characteristics:
- Working voltage (VDC):250
- Working voltage (VAC):250
- Rated voltage configuration V):12 | 24 | 48

|                                                                |       |         |          |       |           |              |  |
|----------------------------------------------------------------|-------|---------|----------|-------|-----------|--------------|--|
| <div>NINGBO XF ELECTRONIC CO., LTD</div> <div>宁波翔洋电气有限公司</div> |       |         |          | Name  |           | Connector    |  |
| Design                                                         | Yang  | 2025. 4 | Revision | 01    | DrawingNo | XT04-2P-CE02 |  |
| Proofread                                                      | Yang  | 2025. 4 |          |       | Material  | PA66+GF15    |  |
| Approval                                                       | Zhang | 2025. 4 | Scale    | 1.5:1 | Color     | Black        |  |
|                                                                |       |         |          |       | Weight Kg |              |  |
|                                                                |       |         |          |       |           | Pages        |  |