

A

B

C

D

E

F

A





B

C

D

E

F

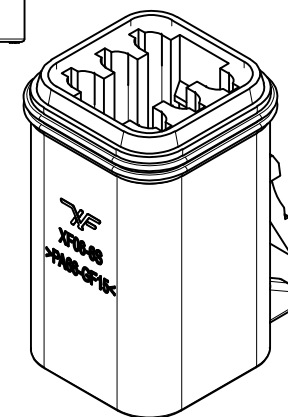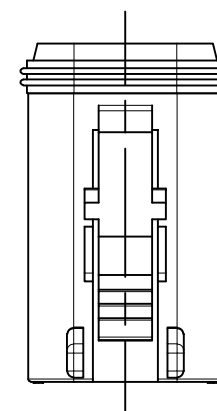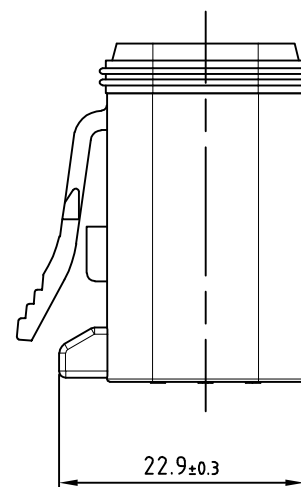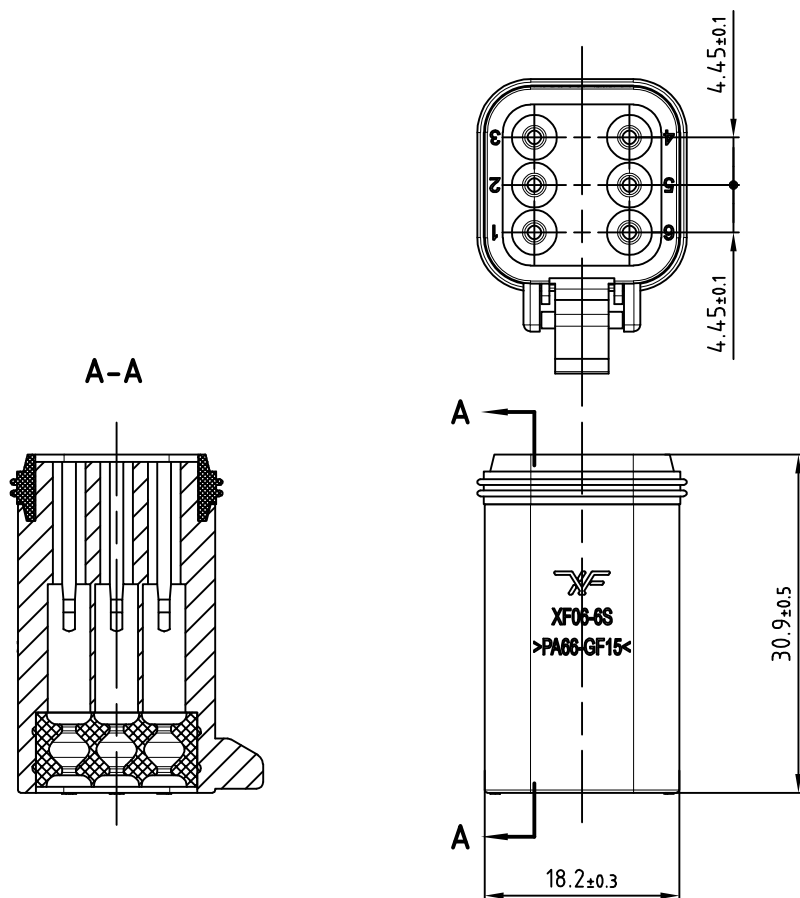

NOTES:

- 1.CURRENT RATING: 13A MAXIMUM.
- 2.OPERATING TEMPERATURE: -40°C TO $+125^{\circ}\text{C}$.
- 3.MOISTURE RESISTANCE:IP68,IP6K9K.
- 4.UL Flame Resistance Rating:UL-94 V0
- 5.Electrical characteristics:
Working voltage (VDC):250
Working voltage (VAC):250
Rated voltage configuration V):12 | 24 | 48

宁波翔沣电气有限公司

NINGBO XF ELECTRONIC CO.,LTD

					Name	Connector
Design	Lai	2025.7	Revision	01	DrawingNo	XT06-6S-CE06
Proofread	Yang	2025.7			Material	PA66+GF15
Approval	Zhang	2025.7	Scale	2:1	Color	Black
					Weight Kg	
					Pages	