

A

B

C

D

E

F

A


B

C







D

E

F

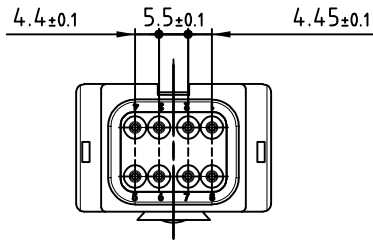

A-A

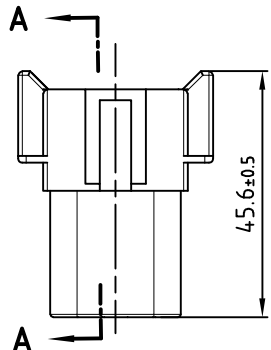

注:

- 端子额定电流 (最大值) (A):13A
- 工作温度:-40℃~125℃
- 防水:IP68、IP6K9K
- UL阻燃性等级:UL-94 V0
- 电气特征:工作电压 (VDC):250
工作电压 (VAC):250
标称电压架构 (V):12|24|48

 宁波翔沅电气有限公司 NINGBO XF ELECTRONIC CO., LTD					名称			连接件	
					型号			XT04-08PD	
					材料			PA66+GF15	
设计	Lai	2026.1	标准化		颜色			棕色	
校对	Yang	2026.1			重量				
审核	Zhang	2026.1	比例	1:1	阶段标记		版次	01	
未注公差: XX.X ±0.2;					A		页数		