

A

B

C

D

E

F

A

B

C








D

E

F

注:

- 1、端子额定电流(最大值)(A):13A
2、工作温度:-40℃~125℃
3、防水:IP68、IP6K9K
4、UL阻燃性等级:UL-94 V0
5、电气特征:工作电压(VDC):250
工作电压(VAC):250
标称电压架构(V):12|24|48

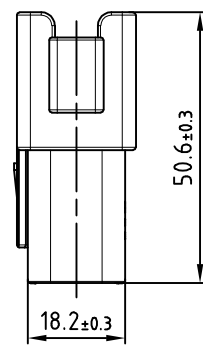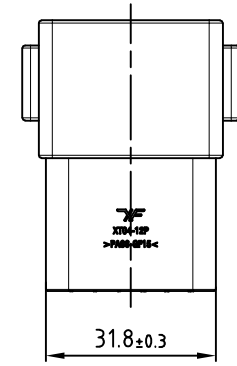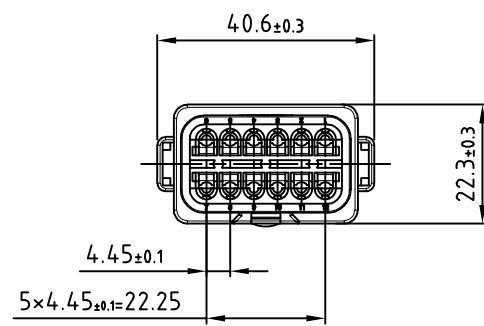

 宁波翔沣电气有限公司 NINGBO XF ELECTRONIC CO.,LTD					名 称		连接件		
					型 号		XT04-12PA-CE08		
					材 料		PA66+GF15		
设 计	Zhang	2025.10	标准化		颜 色		灰色		
校 对	Yang	2025.10			重 量				
审 核	Zhang	2025.10	比 例	1:1	阶段标记		版 次		01
未注公差: XX.X ±0.2;					A		页 数		