

A

B

C

D

E

F

A

B

C








D

E

F

注:

- 1、端子额定电流 (最大值) (A):13A
- 2、工作温度:-40℃~125℃
- 3、防水:IP68、IP6K9K
- 4、UL阻燃性等级:UL-94 V0
- 5、电气特征:工作电压 (VDC):250
- 工作电压 (VAC):250
- 标称电压架构 (V):12|24|48

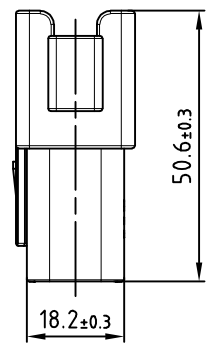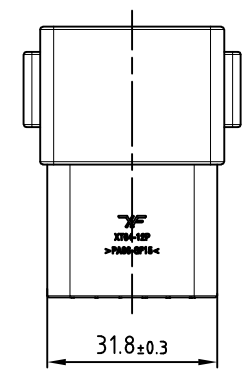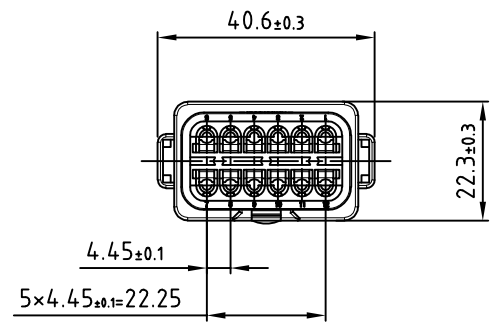

 宁波翔沣电气有限公司 NINGBO XF ELECTRONIC CO.,LTD					名 称	连接件			
					型 号	XT04-12PC-B016			
					材 料	PA66+GF15			
设 计	Zhang	2025.10	标准化		颜 色	绿色			
校 对	Yang	2025.10			重 量				
审 核	Zhang	2025.10	比 例	1:1	阶段标记		版 次	01	
未注公差: XX.X ±0.2;					A		页 数		