
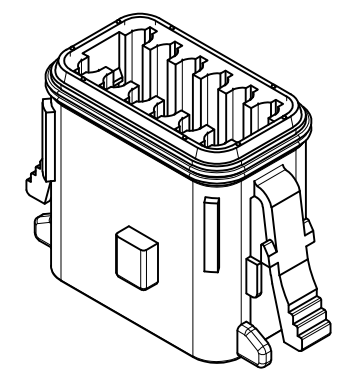
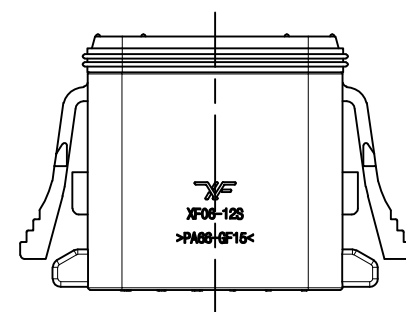
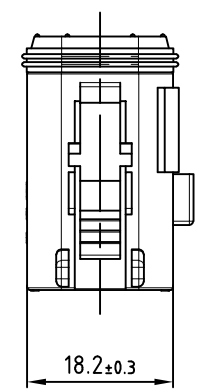


A
B
C
D
E
F

1 2 3 4 5 6 7 8

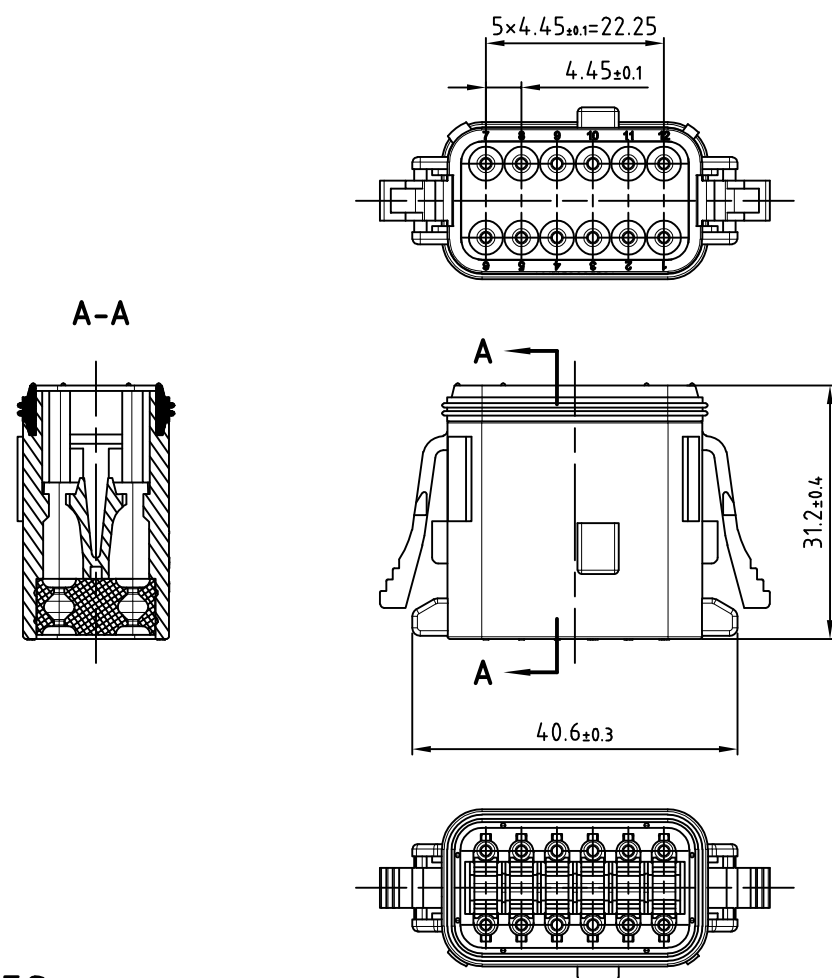

NOTES:

- 1.CURRENT RATING: 13A MAXIMUM.
- 2.OPERATING TEMPERATURE: -40℃ TO +125℃.
- 3.MOISTURE RESISTANCE:IP68,IP6K9K.
- 4.UL Flame Resistance Rating:UL-94 V0
- 5.Electrical characteristics:
Working voltage (VDC):250
Working voltage (VAC):250
Rated voltage configuration V):12 | 24 | 48

 宁波翔沣电气有限公司 NINGBO XF ELECTRONIC CO.,LTD					Name	Connector	
					DrawingNo	XT06-12SA-B016	
					Material	PA66+GF15	
Design	Zhang	2025.6	Revision	01	Color	Grey	
Proofread	Yang	2025.6			Weight Kg		
Approval	Zhang	2025.6	Scale	1.5:1		Pages	

1 2 3 4 5 6 7 8