
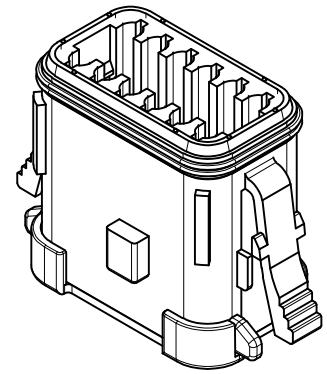
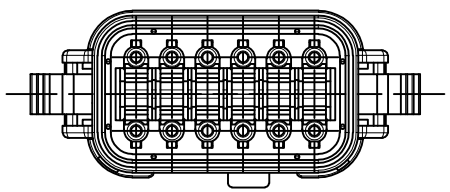
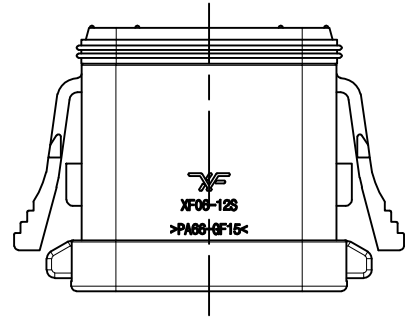
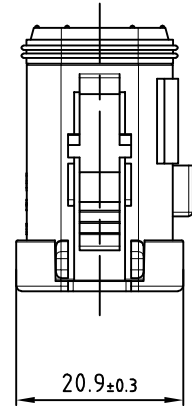
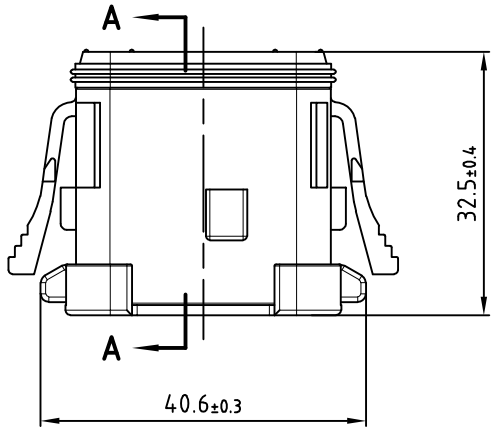
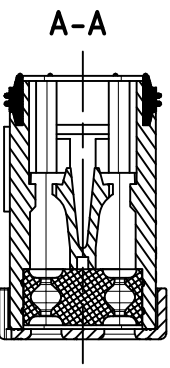


A
B
C
D
E
F

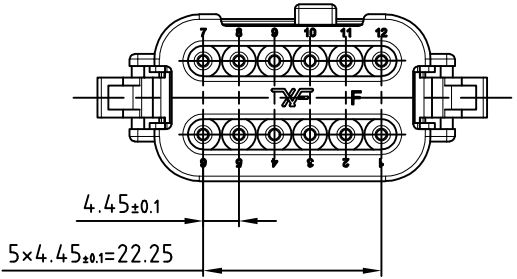

NOTES:

1.CURRENT RATING: 13A MAXIMUM.

2.OPERATING TEMPERATURE: -40℃ TO +125℃.

3.MOISTURE RESISTANCE:IP68,IP6K9K.

4.UL Flame Resistance Rating:UL-94 V0

5.Electrical characteristics:

Working voltage (VDC):250

Working voltage (VAC):250

Rated voltage configuration V):12 | 24 | 48

 宁波翔沣电气有限公司 NINGBO XF ELECTRONIC CO.,LTD					Name	Connector	
					DrawingNo	XT06-12SA-CE11	
					Material	PA66+GF15	
Design	Lai	2025.6	Revision	01	Color	Black	
Proofread	Yang	2025.6			Weight Kg		
Approval	Zhang	2025.6	Scale	1.5:1		Pages	

A
B
C
D
E
F