
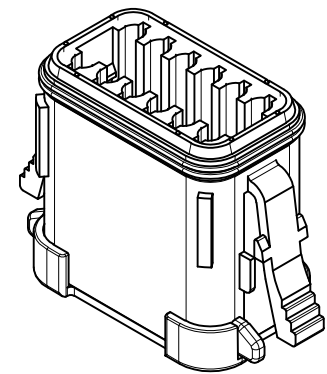
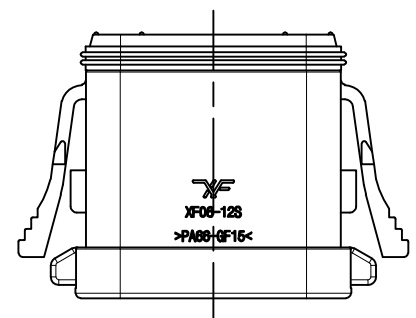
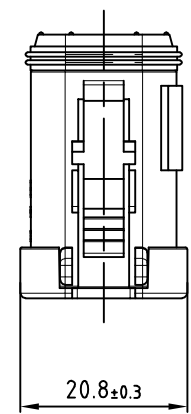
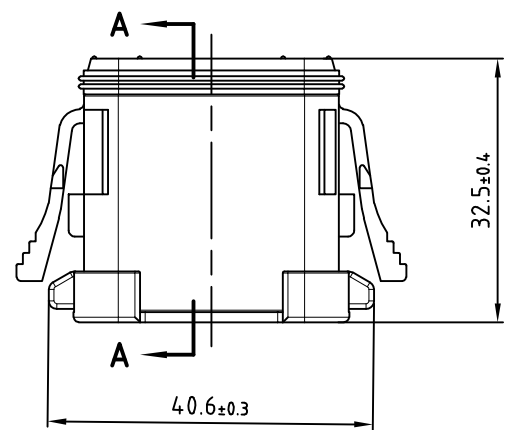
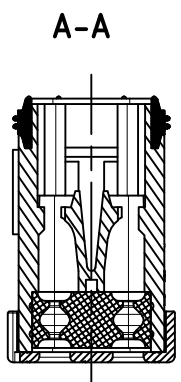


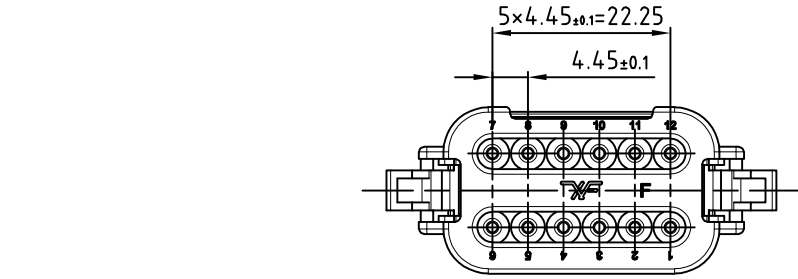

NOTES:

1.CURRENT RATING: 13A MAXIMUM.

2.OPERATING TEMPERATURE: -40℃ TO +125℃.

3.MOISTURE RESISTANCE:IP68,IP6K9K.

4.UL Flame Resistance Rating:UL-94 V0

5.Electrical characteristics:

Working voltage (VDC):250

Working voltage (VAC):250

Rated voltage configuration V):12 | 24 | 48

|                              |       |        |          |       |           |                |
|------------------------------|-------|--------|----------|-------|-----------|----------------|
| NINGBO XF ELECTRONIC CO.,LTD |       |        |          |       | Name      | Connector      |
| NINGBO XF ELECTRONIC CO.,LTD |       |        |          |       | DrawingNo | XT06-12SA-E005 |
|                              |       |        |          |       | Material  | PA66+GF15      |
| Design                       | Zhang | 2025.6 | Revision | 01    | Color     | Black          |
| Proofread                    | Yang  | 2025.6 |          |       | Weight Kg |                |
| Approval                     | Zhang | 2025.6 | Scale    | 1.5:1 | Pages     |                |