

A

B

C

D

E

F

A


B

C







D

E

F

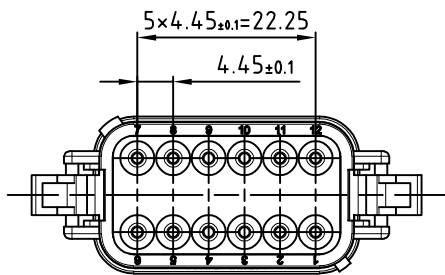

A-A

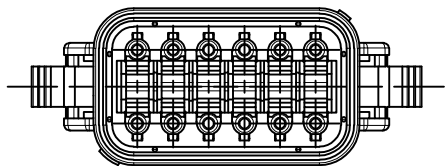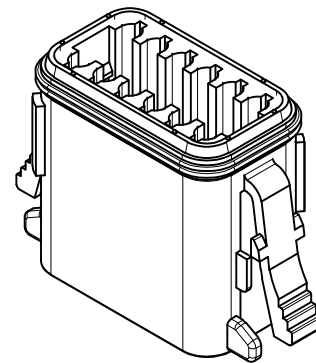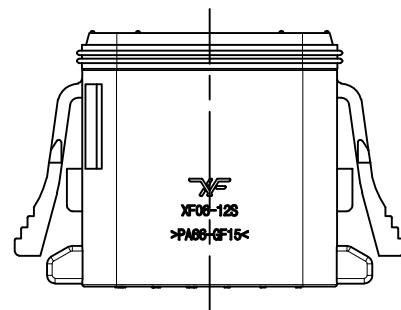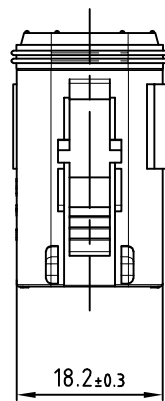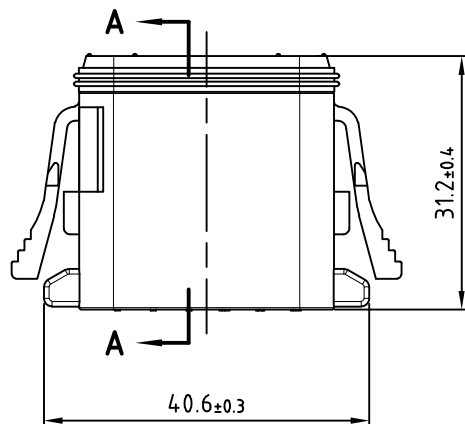

注:

- 1、端子额定电流 (最大值) (A):13A
- 2、工作温度:-40℃~125℃
- 3、防水:IP68、IP6K9K
- 4、UL阻燃性等级:UL-94 V0
- 5、电气特征:工作电压 (VDC):250

工作电压 (VAC):250

标称电压架构 (V):12|24|48

宁波翔沣电气有限公司  
NINGBO XF ELECTRONIC CO., LTD

|                  |       |        |     |       |
|------------------|-------|--------|-----|-------|
| 设计               | Zhang | 2025.6 | 标准化 |       |
| 校对               | Yang  | 2025.6 |     |       |
| 审核               | Zhang | 2025.6 | 比例  | 1.5:1 |
| 未注公差: XX.X ±0.2; |       |        |     |       |

|      |           |    |  |
|------|-----------|----|--|
| 名称   | 连接件       |    |  |
| 型号   | XT06-12SD |    |  |
| 材料   | PA66+GF15 |    |  |
| 颜色   | 棕色        |    |  |
| 重量   |           |    |  |
| 阶段标记 | 版次        | 01 |  |
| A    | 页数        |    |  |