


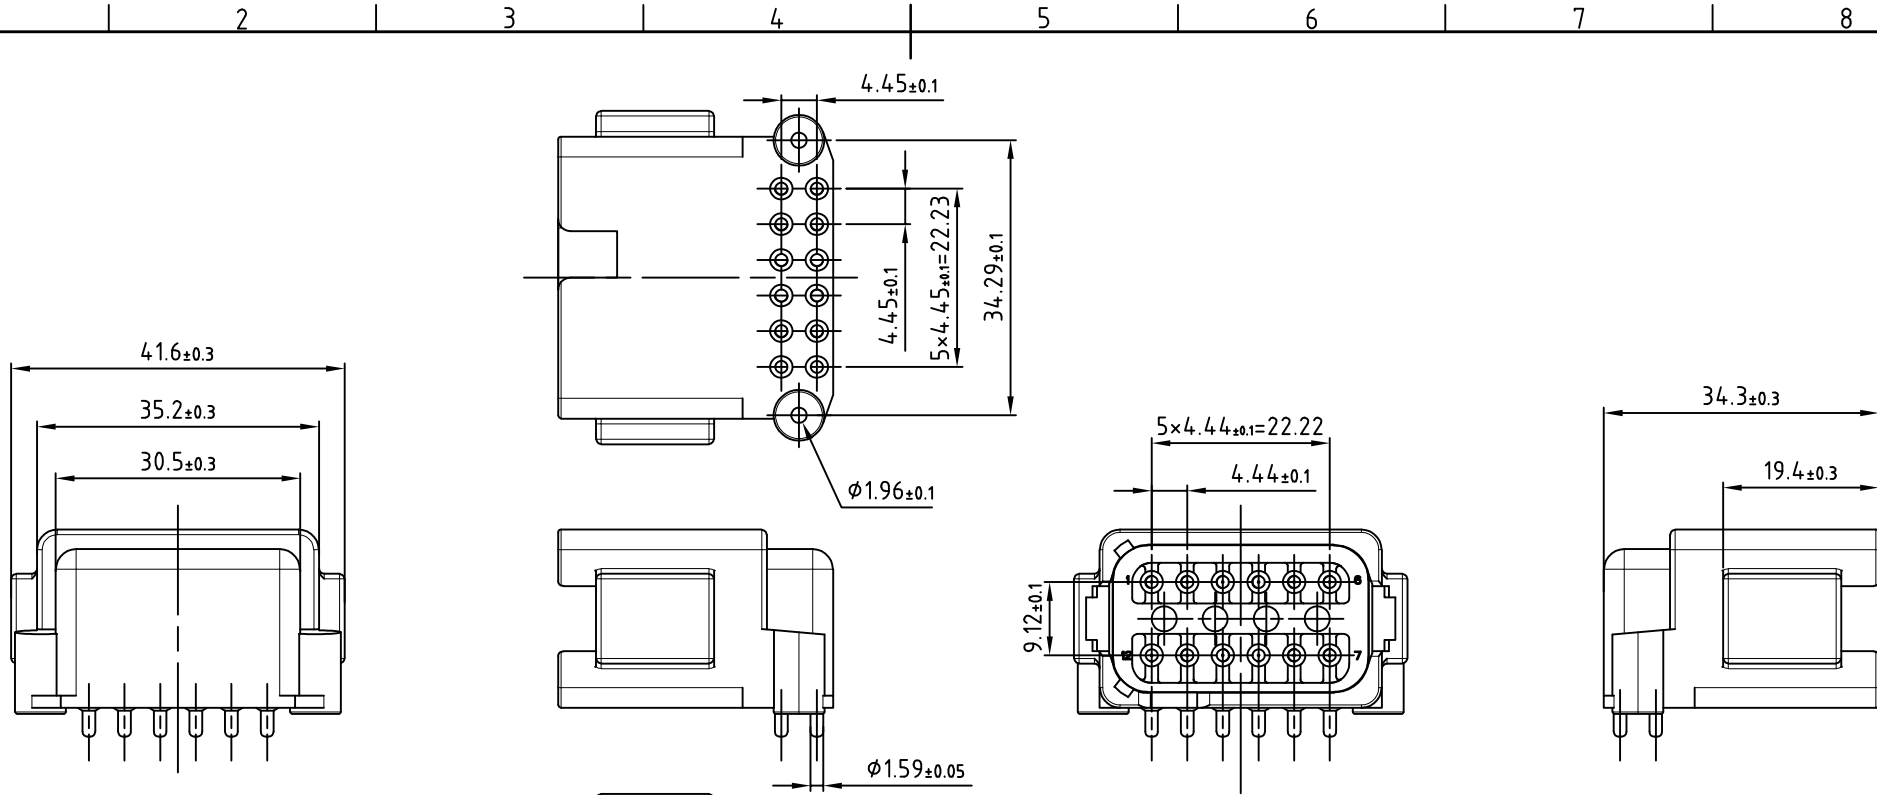

NOTES:

- Rated current (maximum): 13A.
- Working temperature range: -40°C TO $+125^{\circ}\text{C}$.
- Pin plating: Gold over nickle over copper underplate (Sn/Ni/Cu) entire length of pin(RoHS COMPLIANT).
- UL Flame resistance rating: UL-94 V0
- Electrical characteristics:
Working voltage (VDC): 250
Working voltage (VAC): 250
Rated voltage configuration (V): 12 | 24

 宁波翔沣电气有限公司 NINGBO XF ELECTRONIC CO., LTD					Name	Connector	
					DrawingNo	XTF13-12PB-G003	
					Material	PA66+GF15	
Design	Zhang	2025. 10	Revision	01	Color	Black	
Proofread	Yang	2025. 10			Weight Kg		
Approval	Zhang	2025. 10	Scale	1. 5:1		Pages	