

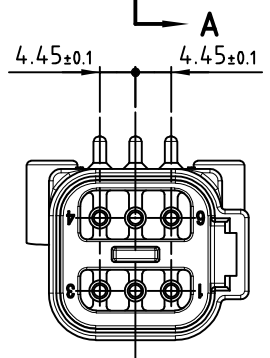
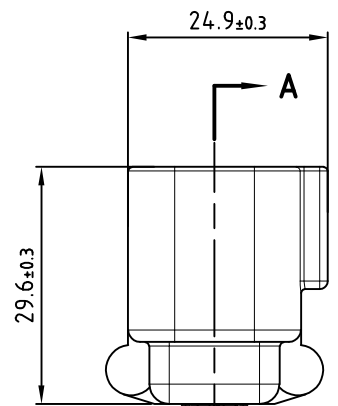
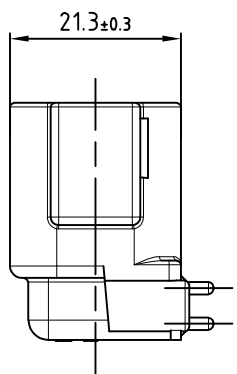




A
B
C
D
E
F

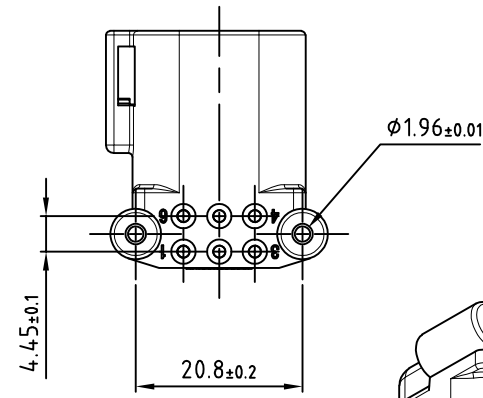

A-A

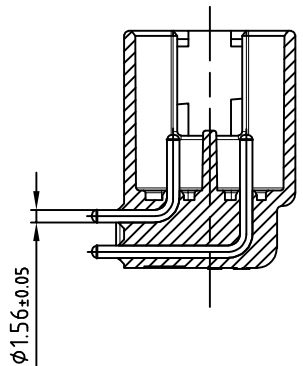

- 注:
- 1、端子额定电流 (最大值) (A):13A
 - 2、工作温度:-40℃~125℃
 - 3、端子接触部电镀材料:锡
 - 4、UL阻燃性等级:UL-94 V0
 - 5、电气特征:工作电压 (VDC):250
- 工作电压 (VAC):250
- 标称电压架构 (V):12|24

 宁波翔沣电气有限公司 NINGBO XF ELECTRONIC CO., LTD					名 称	连接件			
					型 号	XTF13-6P			
					材 料	PA66+GF15			
设 计	Zhang	2026.2	标准化		颜 色	黑色			
校 对	Yang	2026.2			重 量				
审 核	Zhang	2026.2	比 例	1.5:1	阶段标记		版 次	01	
未注公差: XX.X ±0.2;					A			页 数	

A
B
C
D
E
F