

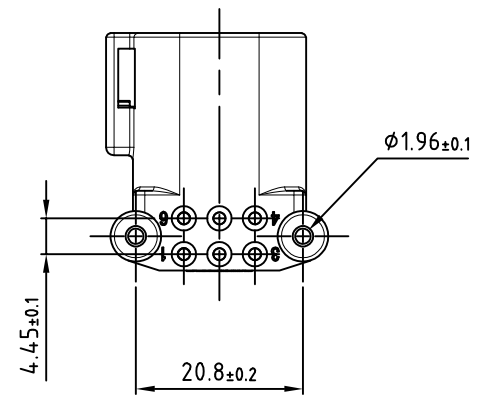
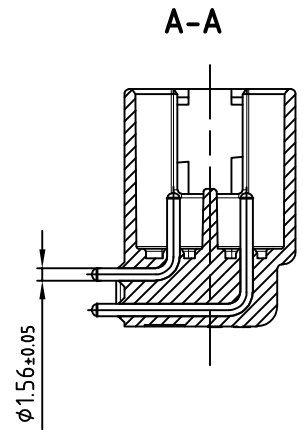
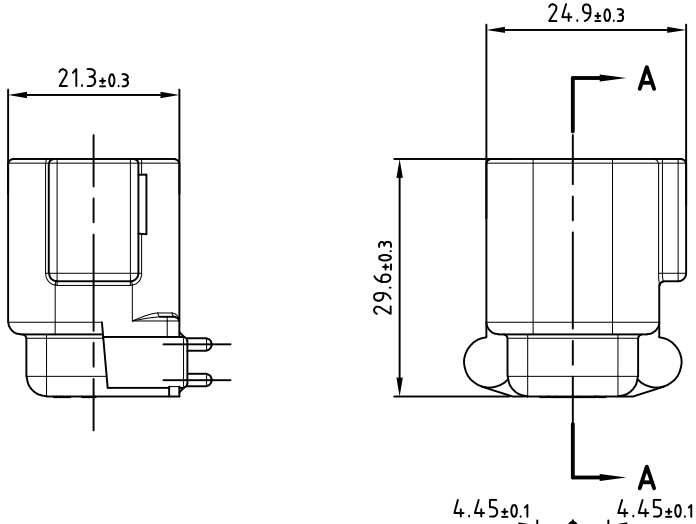


A
B
C
D
E
F



NOTES:

- 1.Rated current (maximum): 13A.
- 2.Working temperature range: -40℃ TO +125℃.
- 3.Pin plating:Gold over nickle over copper underplate (Sn/Ni/Cu) entire length of pin(RoHS COMPLIANT).
- 4.UL Flame resistance rating:UL-94 V0
- 5.Electrical characteristics:
Working voltage (VDC):250
Working voltage (VAC):250
Rated voltage configuration (V):12 | 24

 宁波翔沣电气有限公司 NINGBO XF ELECTRONIC CO.,LTD					Name	Connector	
					DrawingNo	XTF13-6P-G003	
					Material	PA66+GF15	
Design	Zhang	2026.2	Revision	01	Color	Black	
Proofread	Yang	2026.2			Weight Kg		
Approval	Zhang	2026.2	Scale	1.5:1		Pages	