


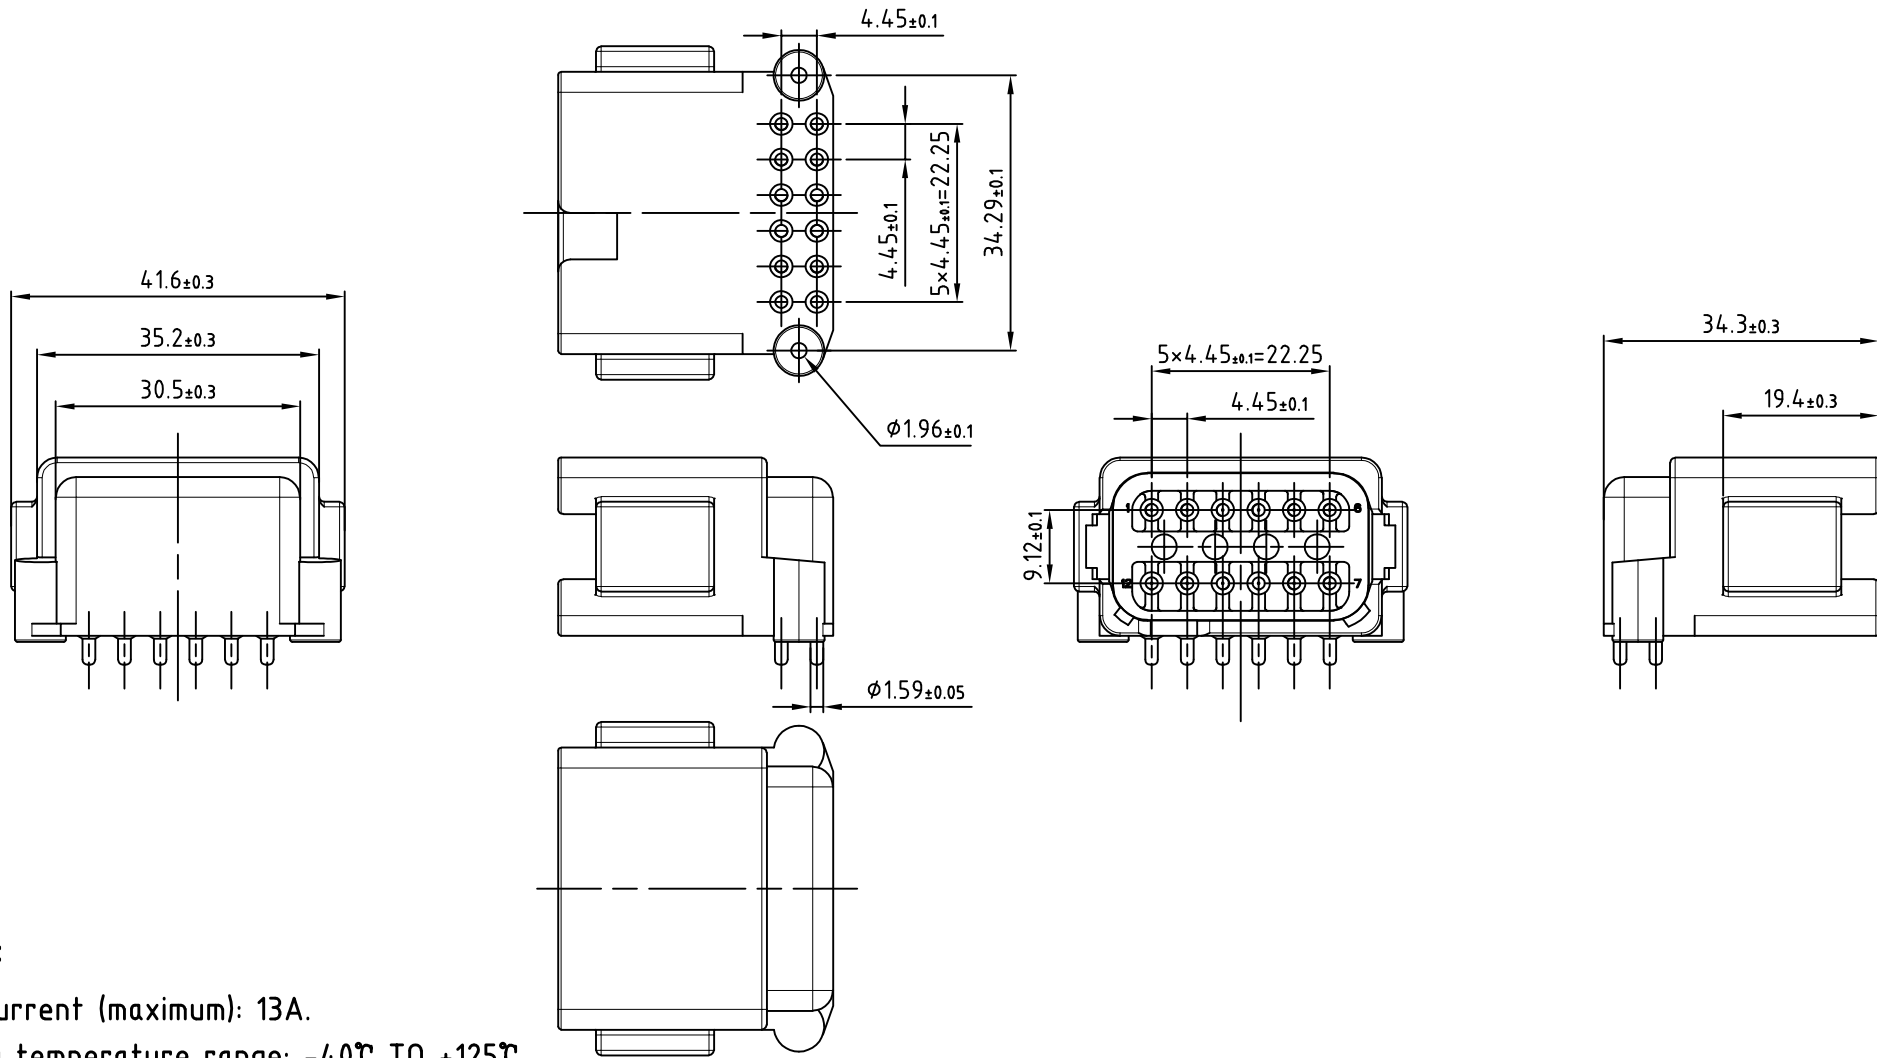

NOTES:

- Rated current (maximum): 13A.
- Working temperature range: -40°C TO $+125^{\circ}\text{C}$.
- Pin plating: Tin over nickle over copper underplate (Sn/Ni/Cu)
entire length of pin(RoHS COMPLIANT).
- UL Flame resistance rating:UL-94 V0
- Electrical characteristics:
Working voltage (VDC):250
Working voltage (VAC):250
Rated voltage configuration (V):12 | 24

 宁波翔沣电气有限公司 NINGBO XF ELECTRONIC CO., LTD					Name	Connector	
					DrawingNo	XTF13-12PA	
					Material	PA66+GF15	
Design	Lai	2025. 10	Revision	01	Color	Gray	
Proofread	Yang	2025. 10			Weight Kg		
Approval	Zhang	2025. 10	Scale	1. 5:1		Pages	